


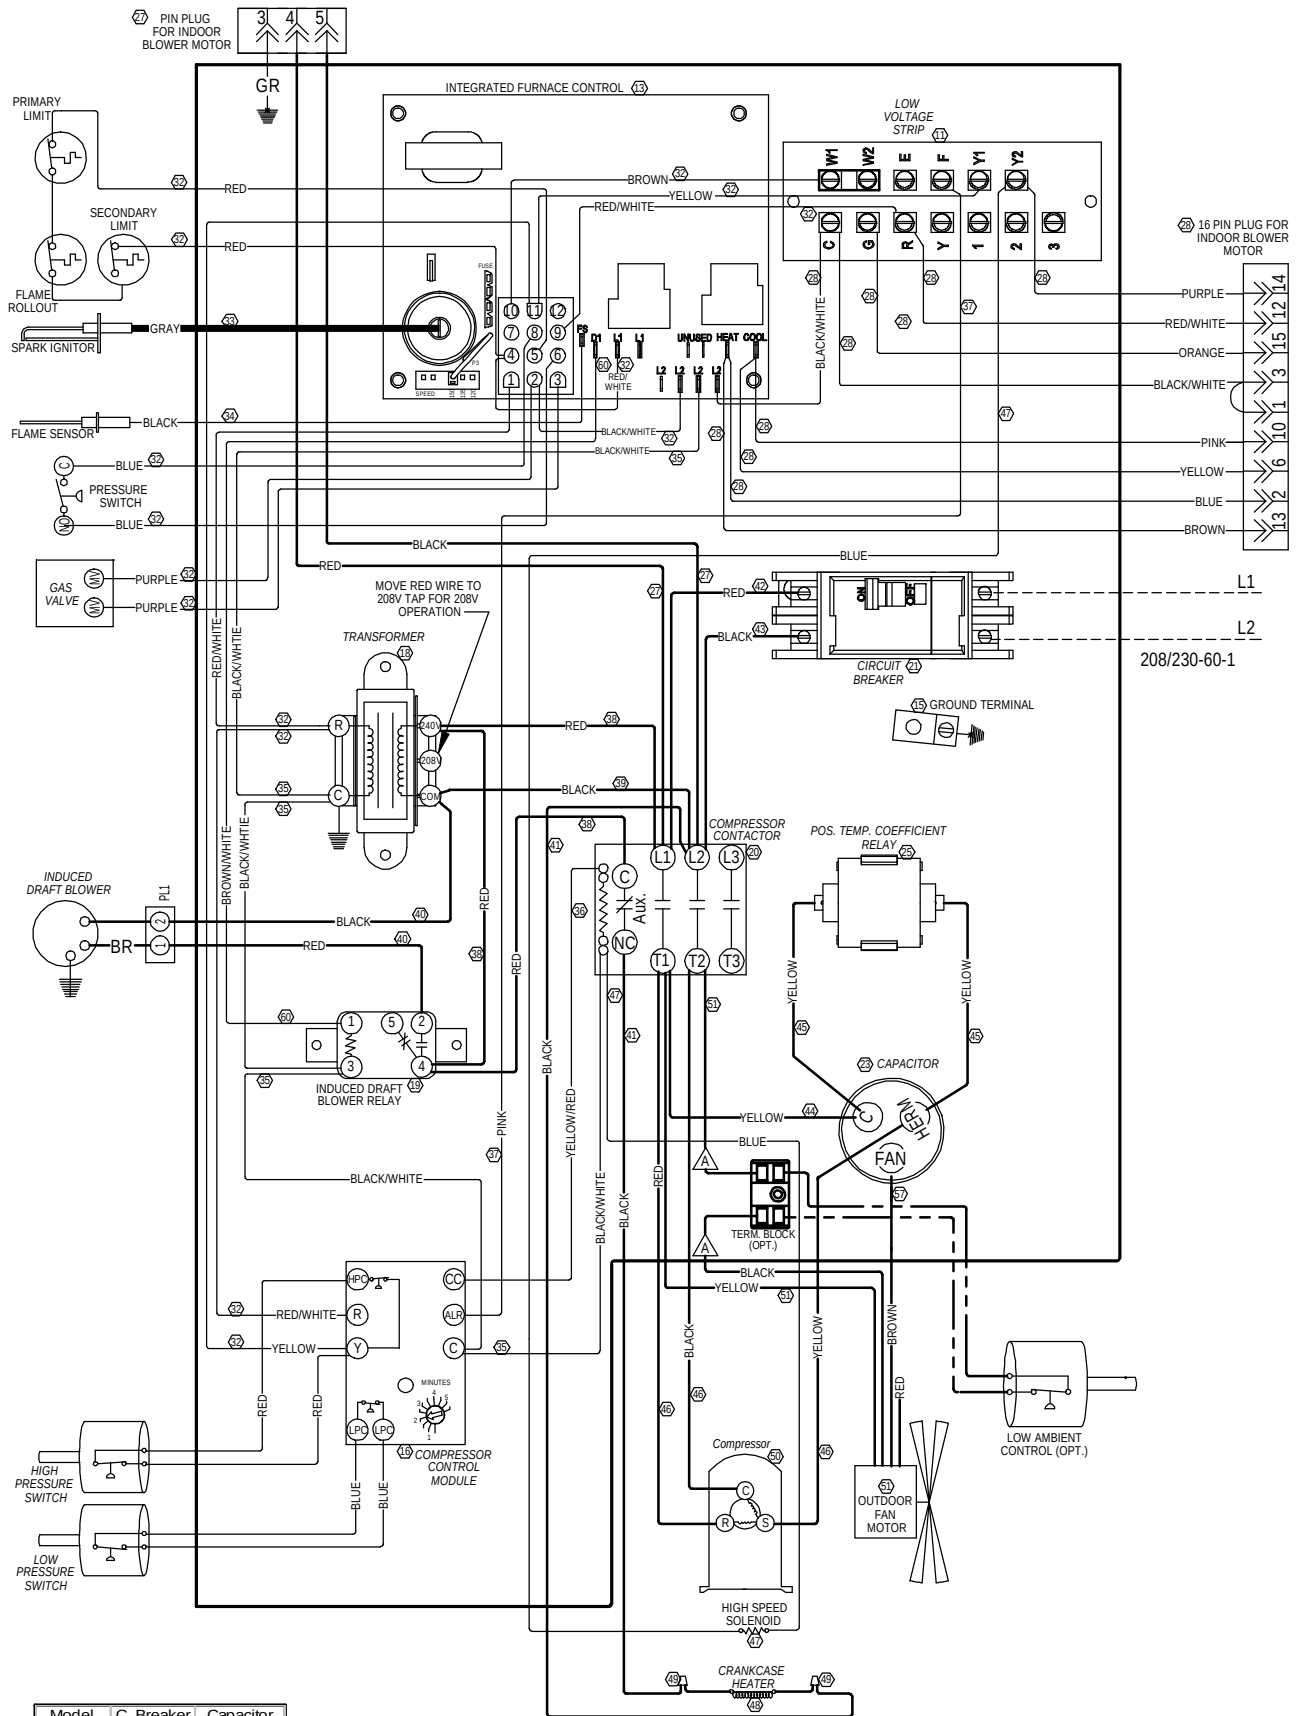

Model	C. Breaker	Capacitor
WG3S1-A	35A	40+10/3/70
WG4S1-A	40A	45+10/3/70
WG5S1-A	50A	80+10/3/70

USE COPPER CONDUCTORS
SUITABLE FOR AT LEAST 75° C

Wire Identification numbers
for Bard use only.

	Factory	Field	Optional
High Voltage			
Low Voltage			

WIRES CONNECT
IF OPTION
NOT USED

IF ANY ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105° C EXCEPT THE IGNITION CABLE WHICH IS 250°C HIGH VOLTAGE CABLE