


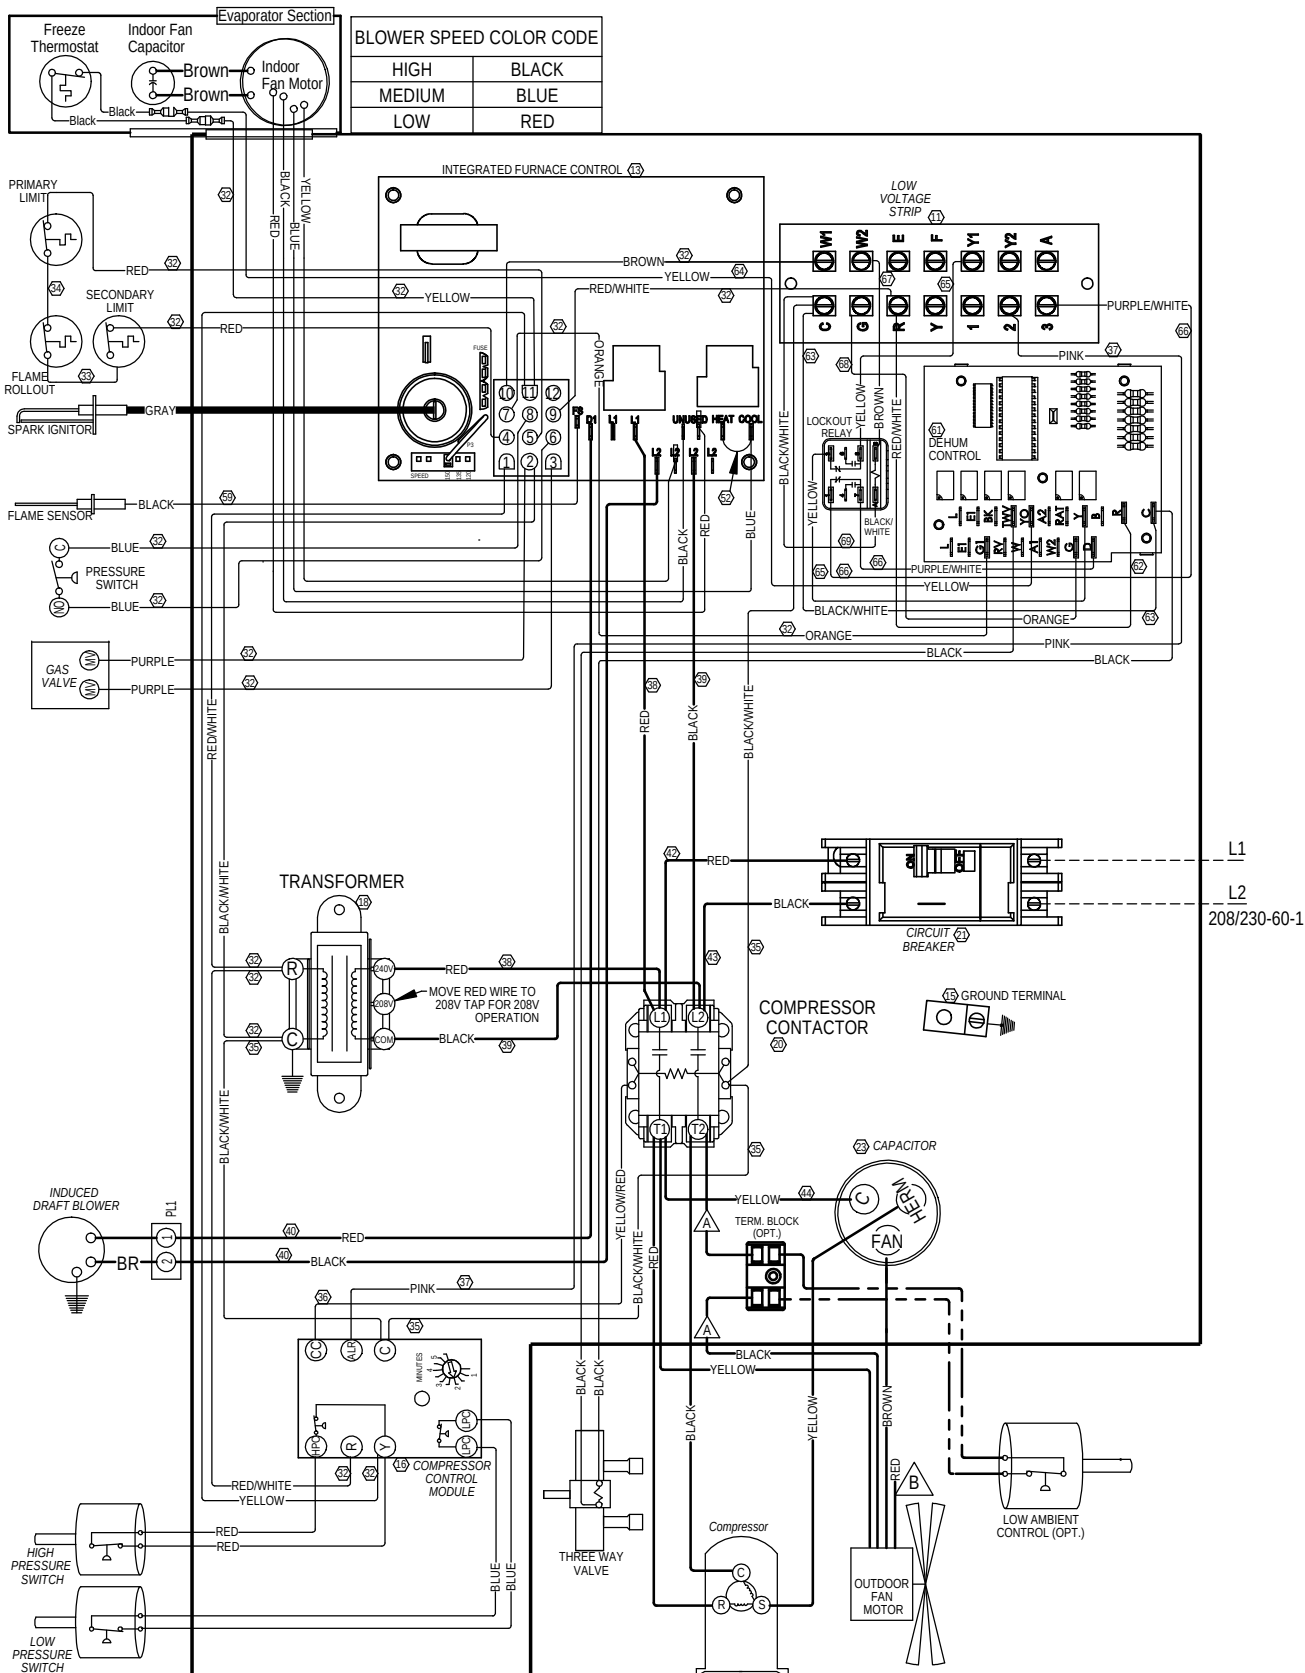

Model	C. Breaker	Capacitor
W30G1DA	30A	45+5/370
W36G1DA	35A	45+5/370
W42G1DA	50A	45+10/370

USE COPPER CONDUCTORS
SUITABLE FOR AT LEAST 75° C

IF ANY ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105° C EXCEPT THE IGNITION CABLE WHICH IS 250° C HIGH VOLTAGE CABLE

Wire Identification numbers
for Bard use only.

	Factory	Field	Optional
High Voltage			
Low Voltage			

WIRES CONNECT
IF OPTION
NOT USED

WIRE NOT APPLICABLE
TO ALL MODELS

Bard
Bard Mfg. Co.
Bryan, Ohio

4085-151 C