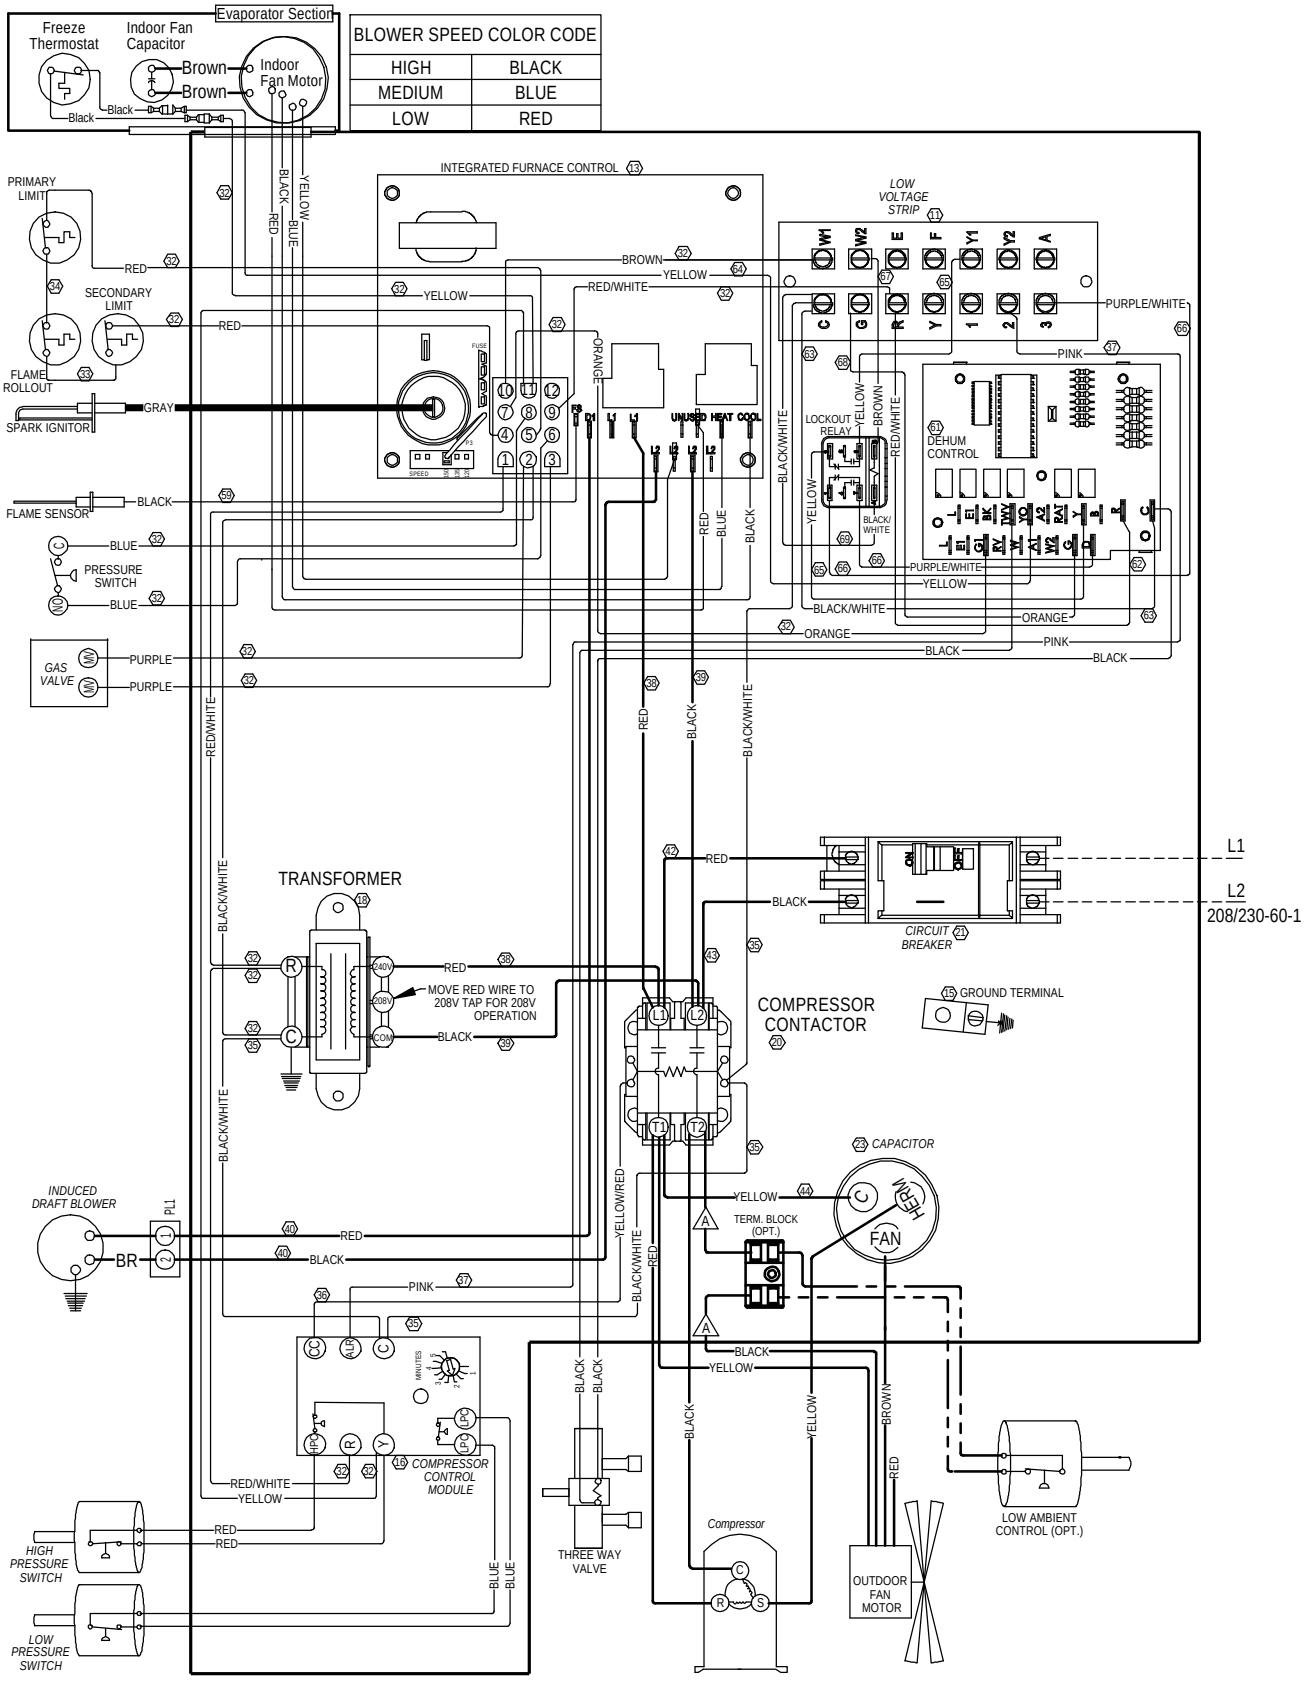

Model	C. Breaker	Capacitor
W48G1DA	50A	70+10/370
W60G1DA	60A	80+10/370

USE COPPER CONDUCTORS SUITABLE FOR AT LEAST 75° C

IF ANY ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105° C EXCEPT THE IGNITION CABLE WHICH IS 250°C HIGH VOLTAGE CABLE

(99) Wire Identification numbers for Bard use only.

	Factory	Field	Optional
High Voltage			
Low Voltage			

(A) WIRES CONNECT IF OPTION NOT USED

Bard Mfg. Co.
Bryan, Ohio
4085-153 A