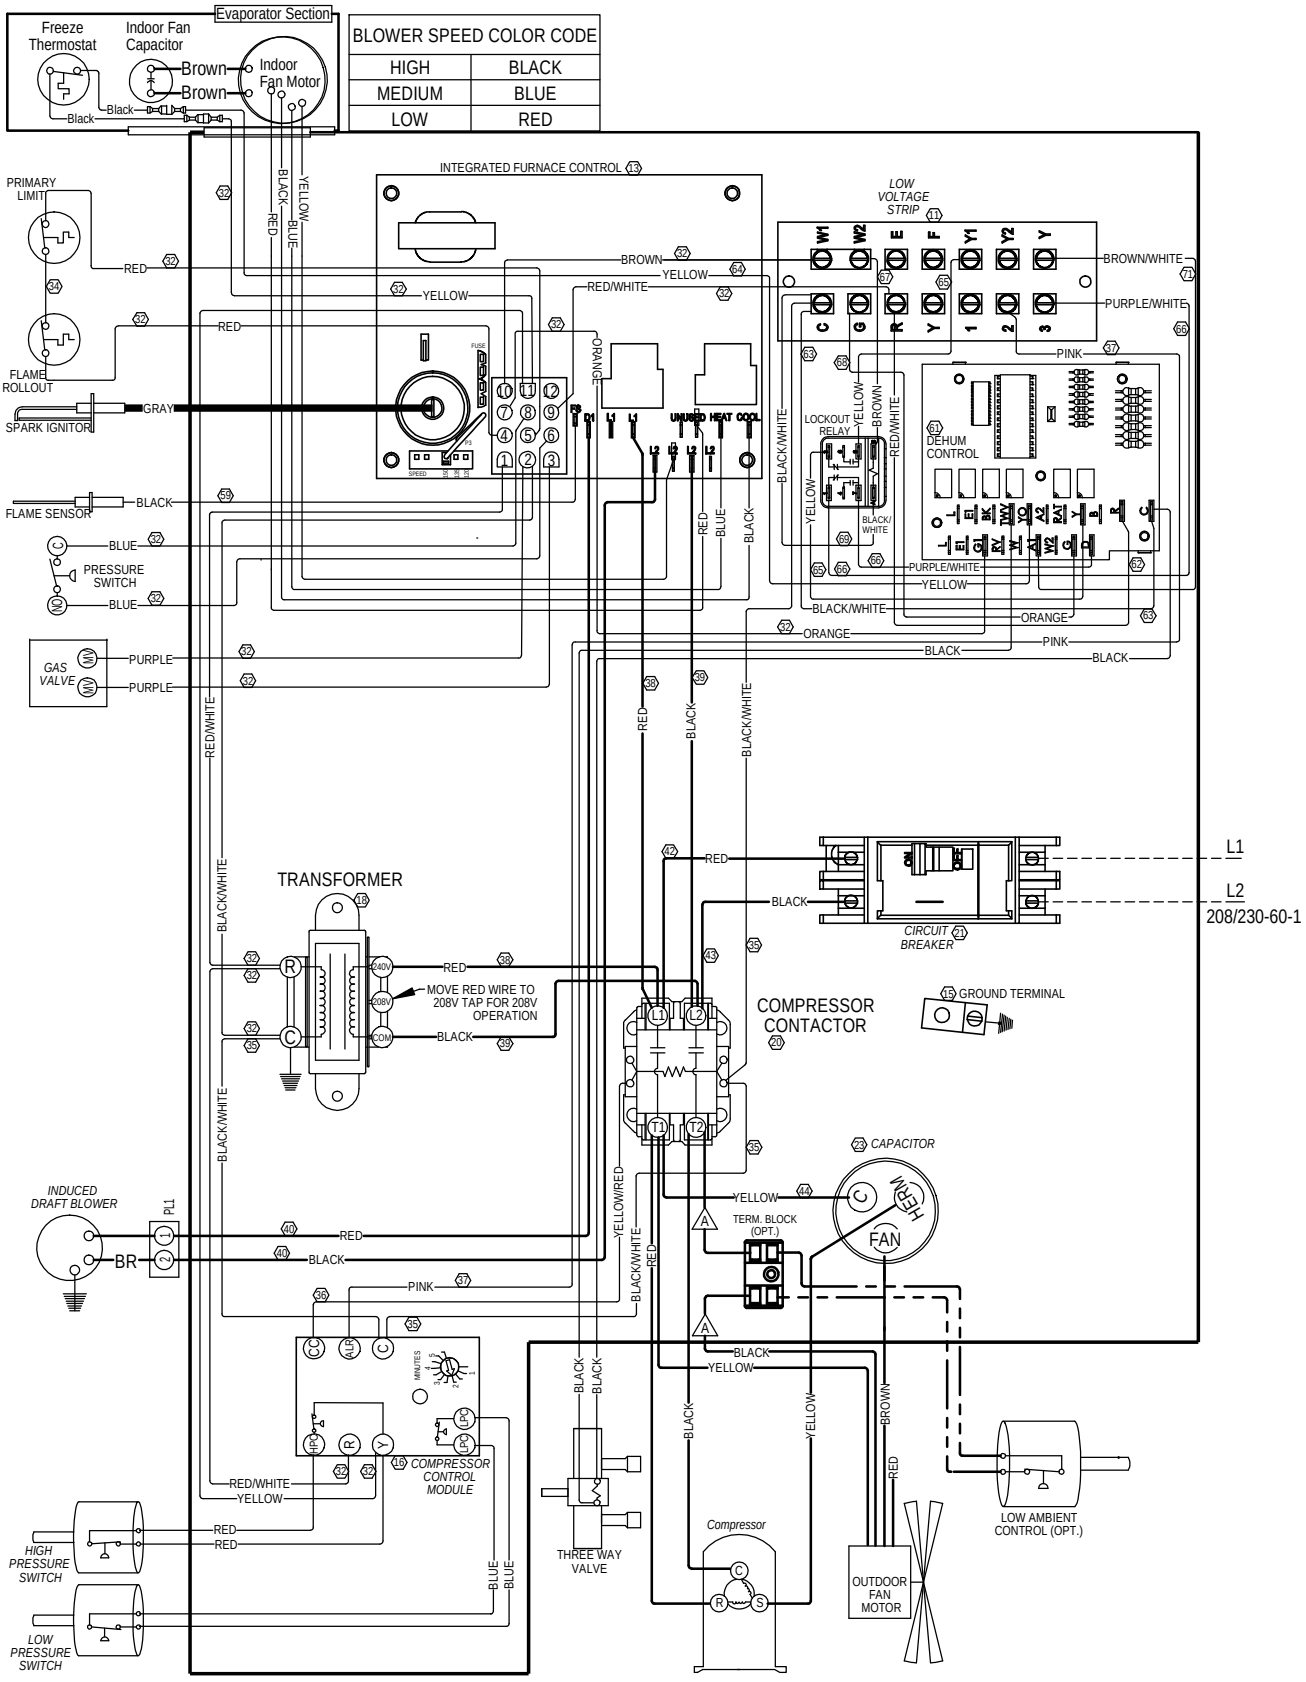


| Model | C. Breaker | Capacitor |
|---|---|---|
| W48G2DA | 50A | 70+10/370 |
| W60G2DA | 60A | 80+10/370 |

USE COPPER CONDUCTORS SUITABLE FOR AT LEAST 75° C

IF ANY ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105° C EXCEPT THE IGNITION CABLE WHICH IS 250°C HIGH VOLTAGE CABLE

(99) Wire Identification numbers for Bard use only.

| | Factory | Field | Optional |
|---|---|---|---|
| High Voltage | | | |
| Low Voltage | | | |

(A) WIRES CONNECT IF OPTION NOT USED

Bard Mfg. Co.
Bryan, Ohio
4085-169