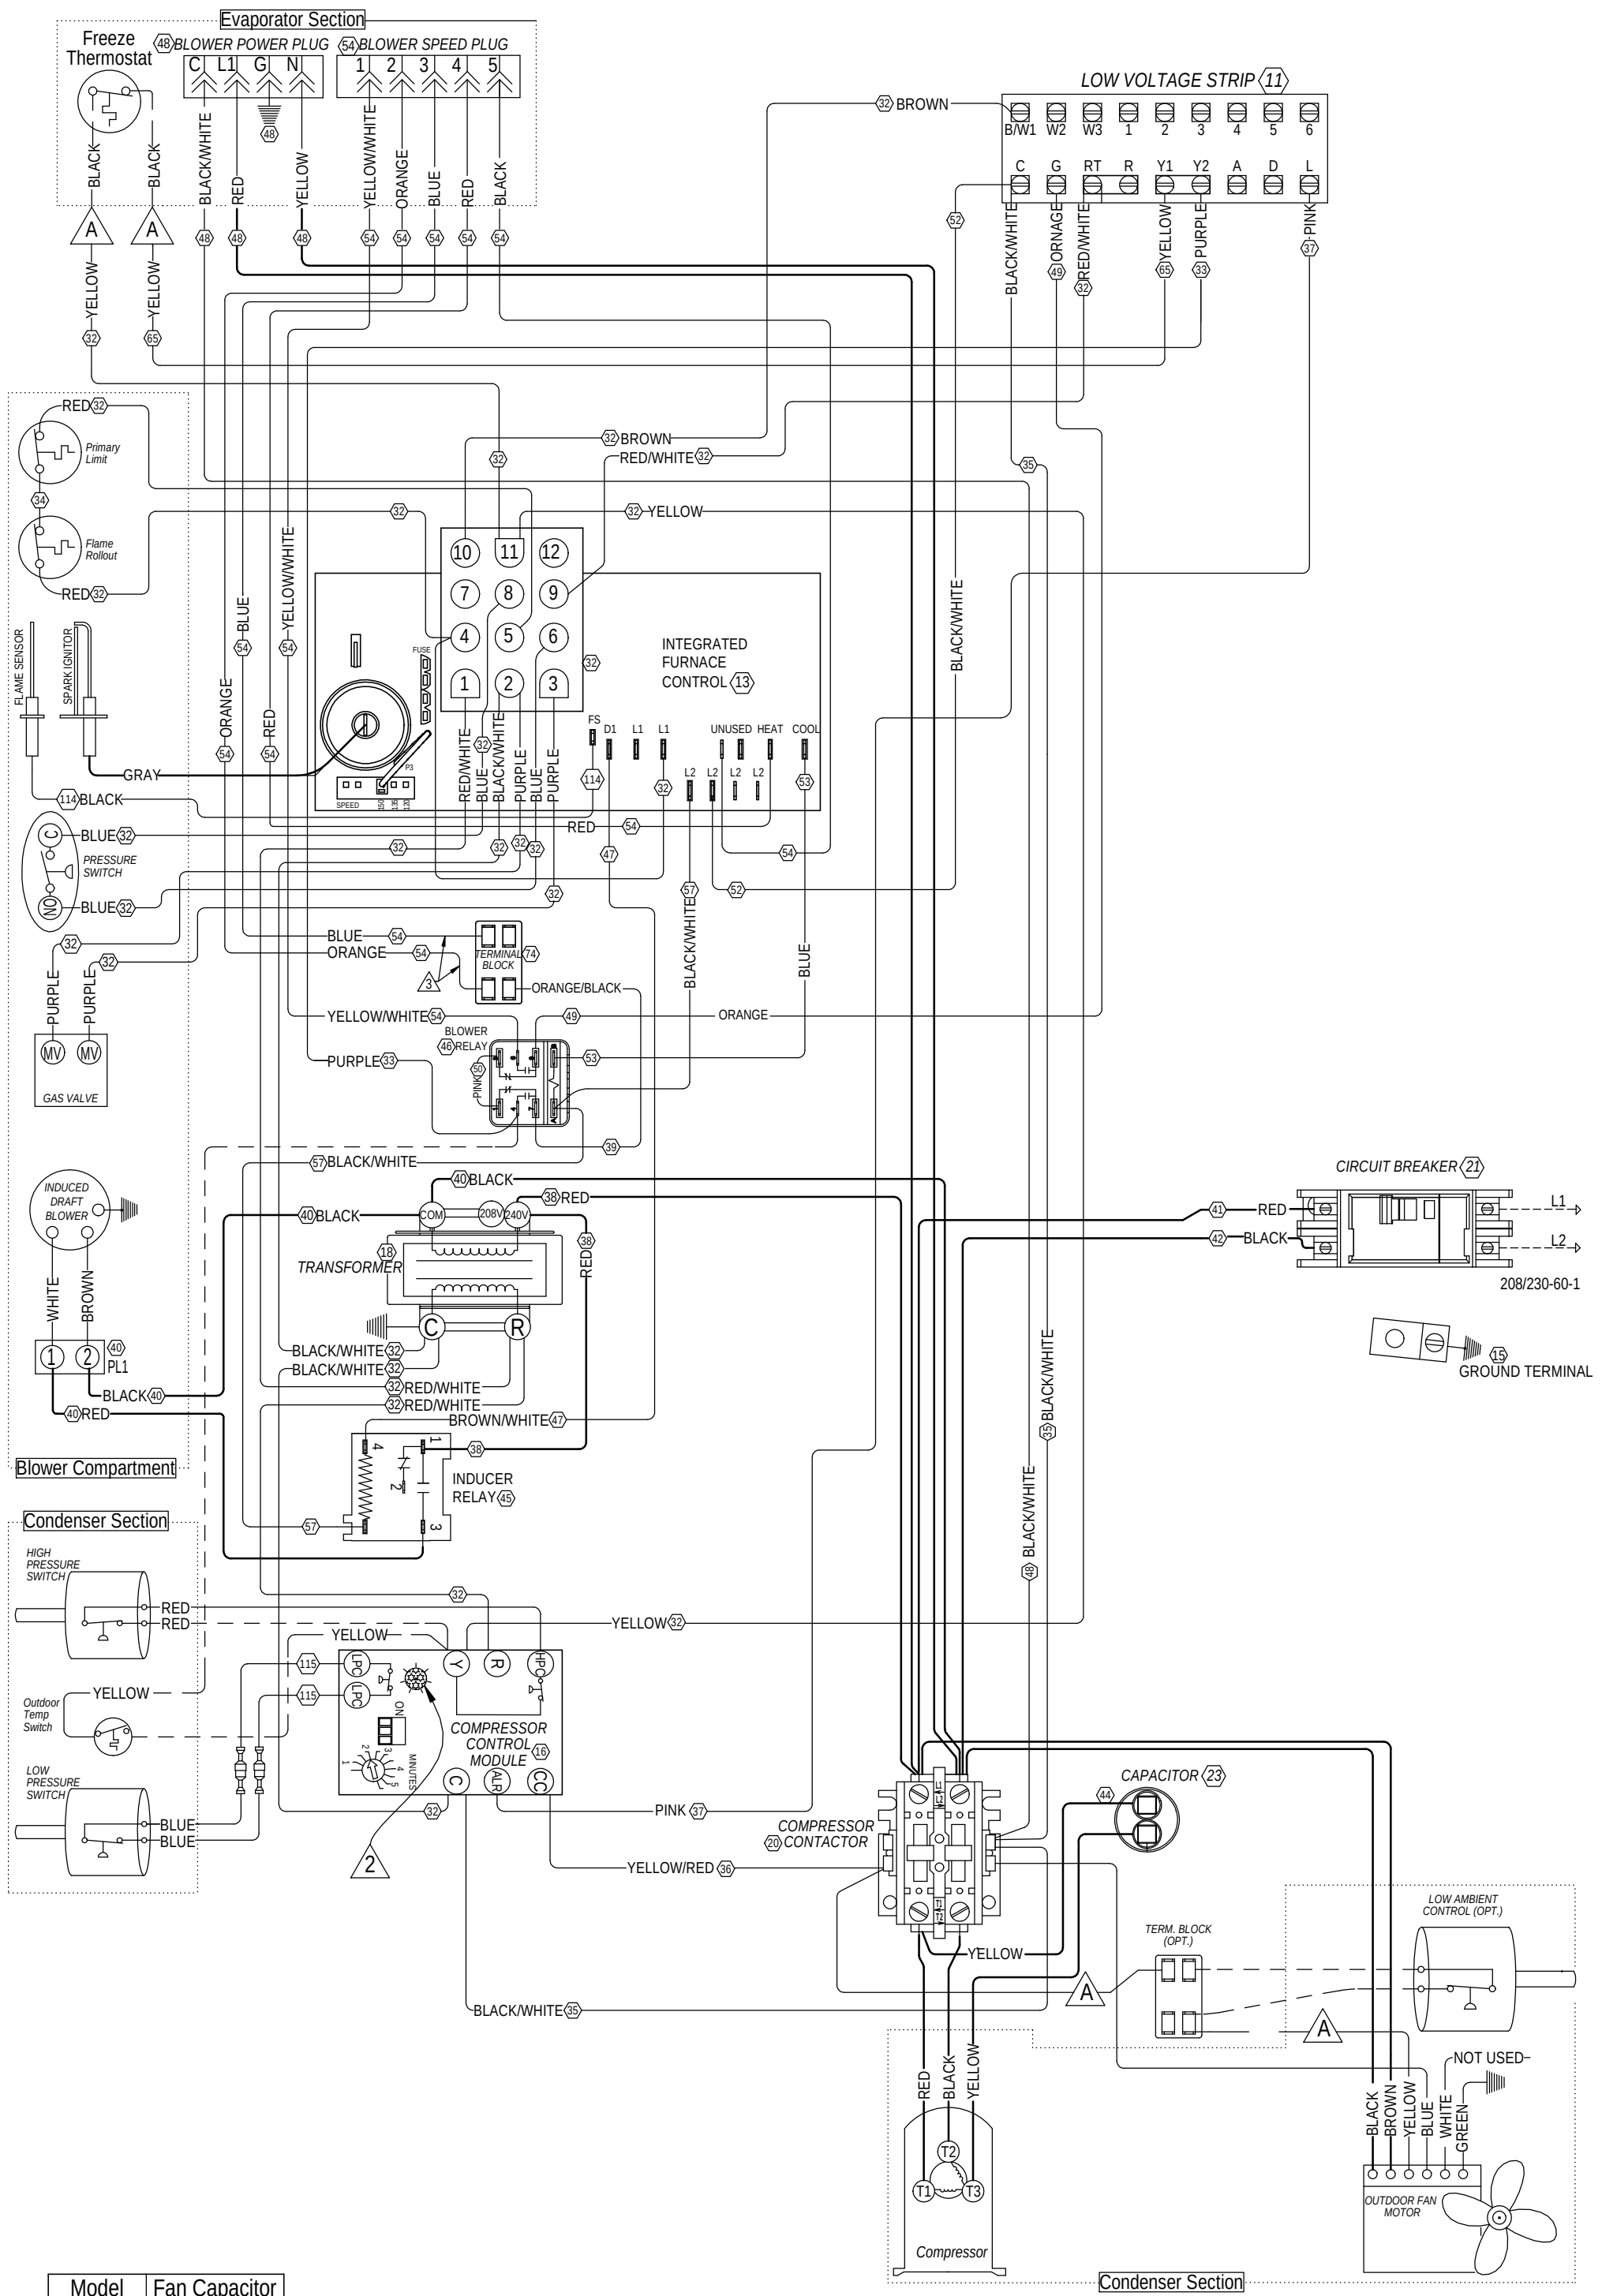

Model	Fan Capacitor
W48G*DC	15 / 370
W60G*DC	N/A

3 TO CHANGE COOLING BLOWER SPEEDS, SWAP BLUE AND ORANGE WIRES

IF ANY ORIGINAL WIRES SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST105° C EXCEPT THE IGNITION CABLE WHICH IS 250°C HIGH VOLTAGE CABLE

A → A Same Letter Designated Wires Connect if Option Not Used

Wire Identification numbers for Bard use only. 99

2 RED - HIGH PRESSURE FAULT
BLUE - LOW PRESSURE FAULT
BLUE FLASH - LOW VOLTAGE

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.

WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.

	Factory	Field	Optional
High Voltage	———	- - - - -	— —
Low Voltage	———	- - - - -	— —

4085-175 D