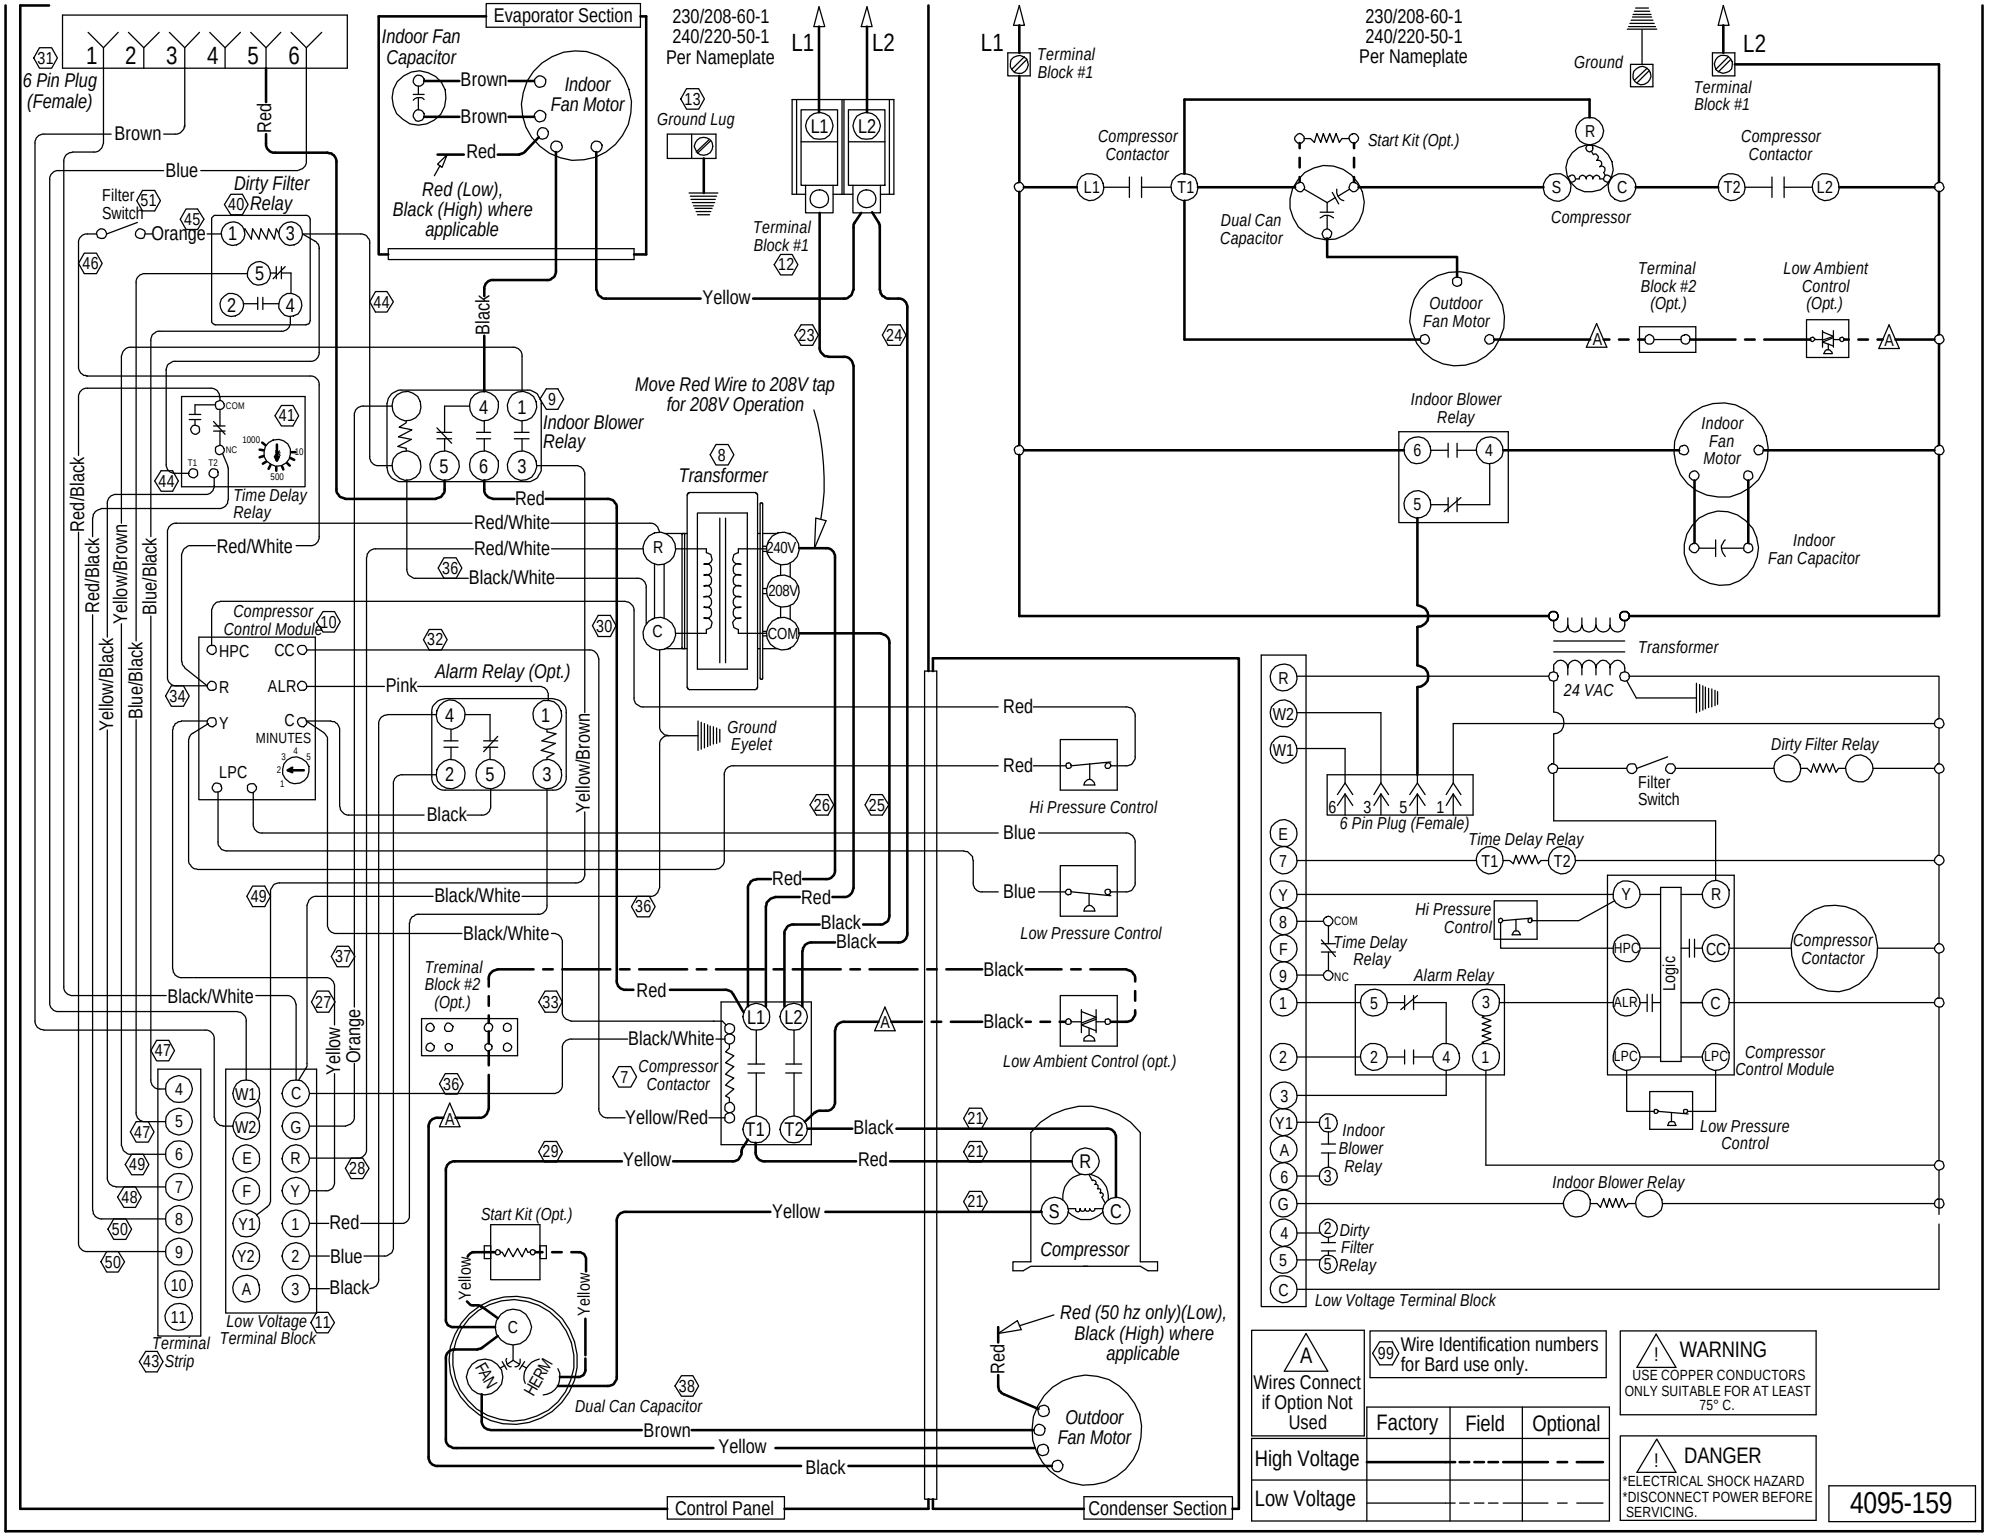
Evaporator Section
Control Panel
Condenser Section
230/208-60-1
240/220-50-1
Per Nameplate
6 Pin Plug (Female)
Indoor Fan Capacitor
Indoor Fan Motor
Red (Low), Black (High) where applicable
Ground Lug
Terminal Block #1
Filter Switch
Dirty Filter Relay
Orange
Blue
Brown
Red
Yellow
Black
Red/Black
Red/White
Black/White
Yellow/Black
Yellow/Brown
Blue/Black
Time Delay Relay
Indoor Blower Relay
Move Red Wire to 208V tap for 208V Operation
Transformer
240V
208V
COM
Compressor Control Module
HPC
CC
R
ALR
C
Y
LPC
MINUTES
Alarm Relay (Opt.)
Pink
Ground Eyelet
Hi Pressure Control
Low Pressure Control
Low Ambient Control (opt.)
Treminal Block #2 (Opt.)
Compressor Contactor
Yellow/Red
Start Kit (Opt.)
Dual Can Capacitor
Compressor
Outdoor Fan Motor
Red (50 hz only)(Low), Black (High) where applicable
Low Voltage Terminal Block
Terminal Strip
Ground
Compressor Contactor
Dual Can Capacitor
Terminal Block #2 (Opt.)
Low Ambient Control (Opt.)
Indoor Fan Motor
Indoor Fan Capacitor
24 VAC
Logic
Low Voltage Terminal Block
Wires Connect if Option Not Used
Wire Identification numbers for Bard use only.
Factory
Field
Optional
High Voltage
Low Voltage
WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.
DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.
4095-159