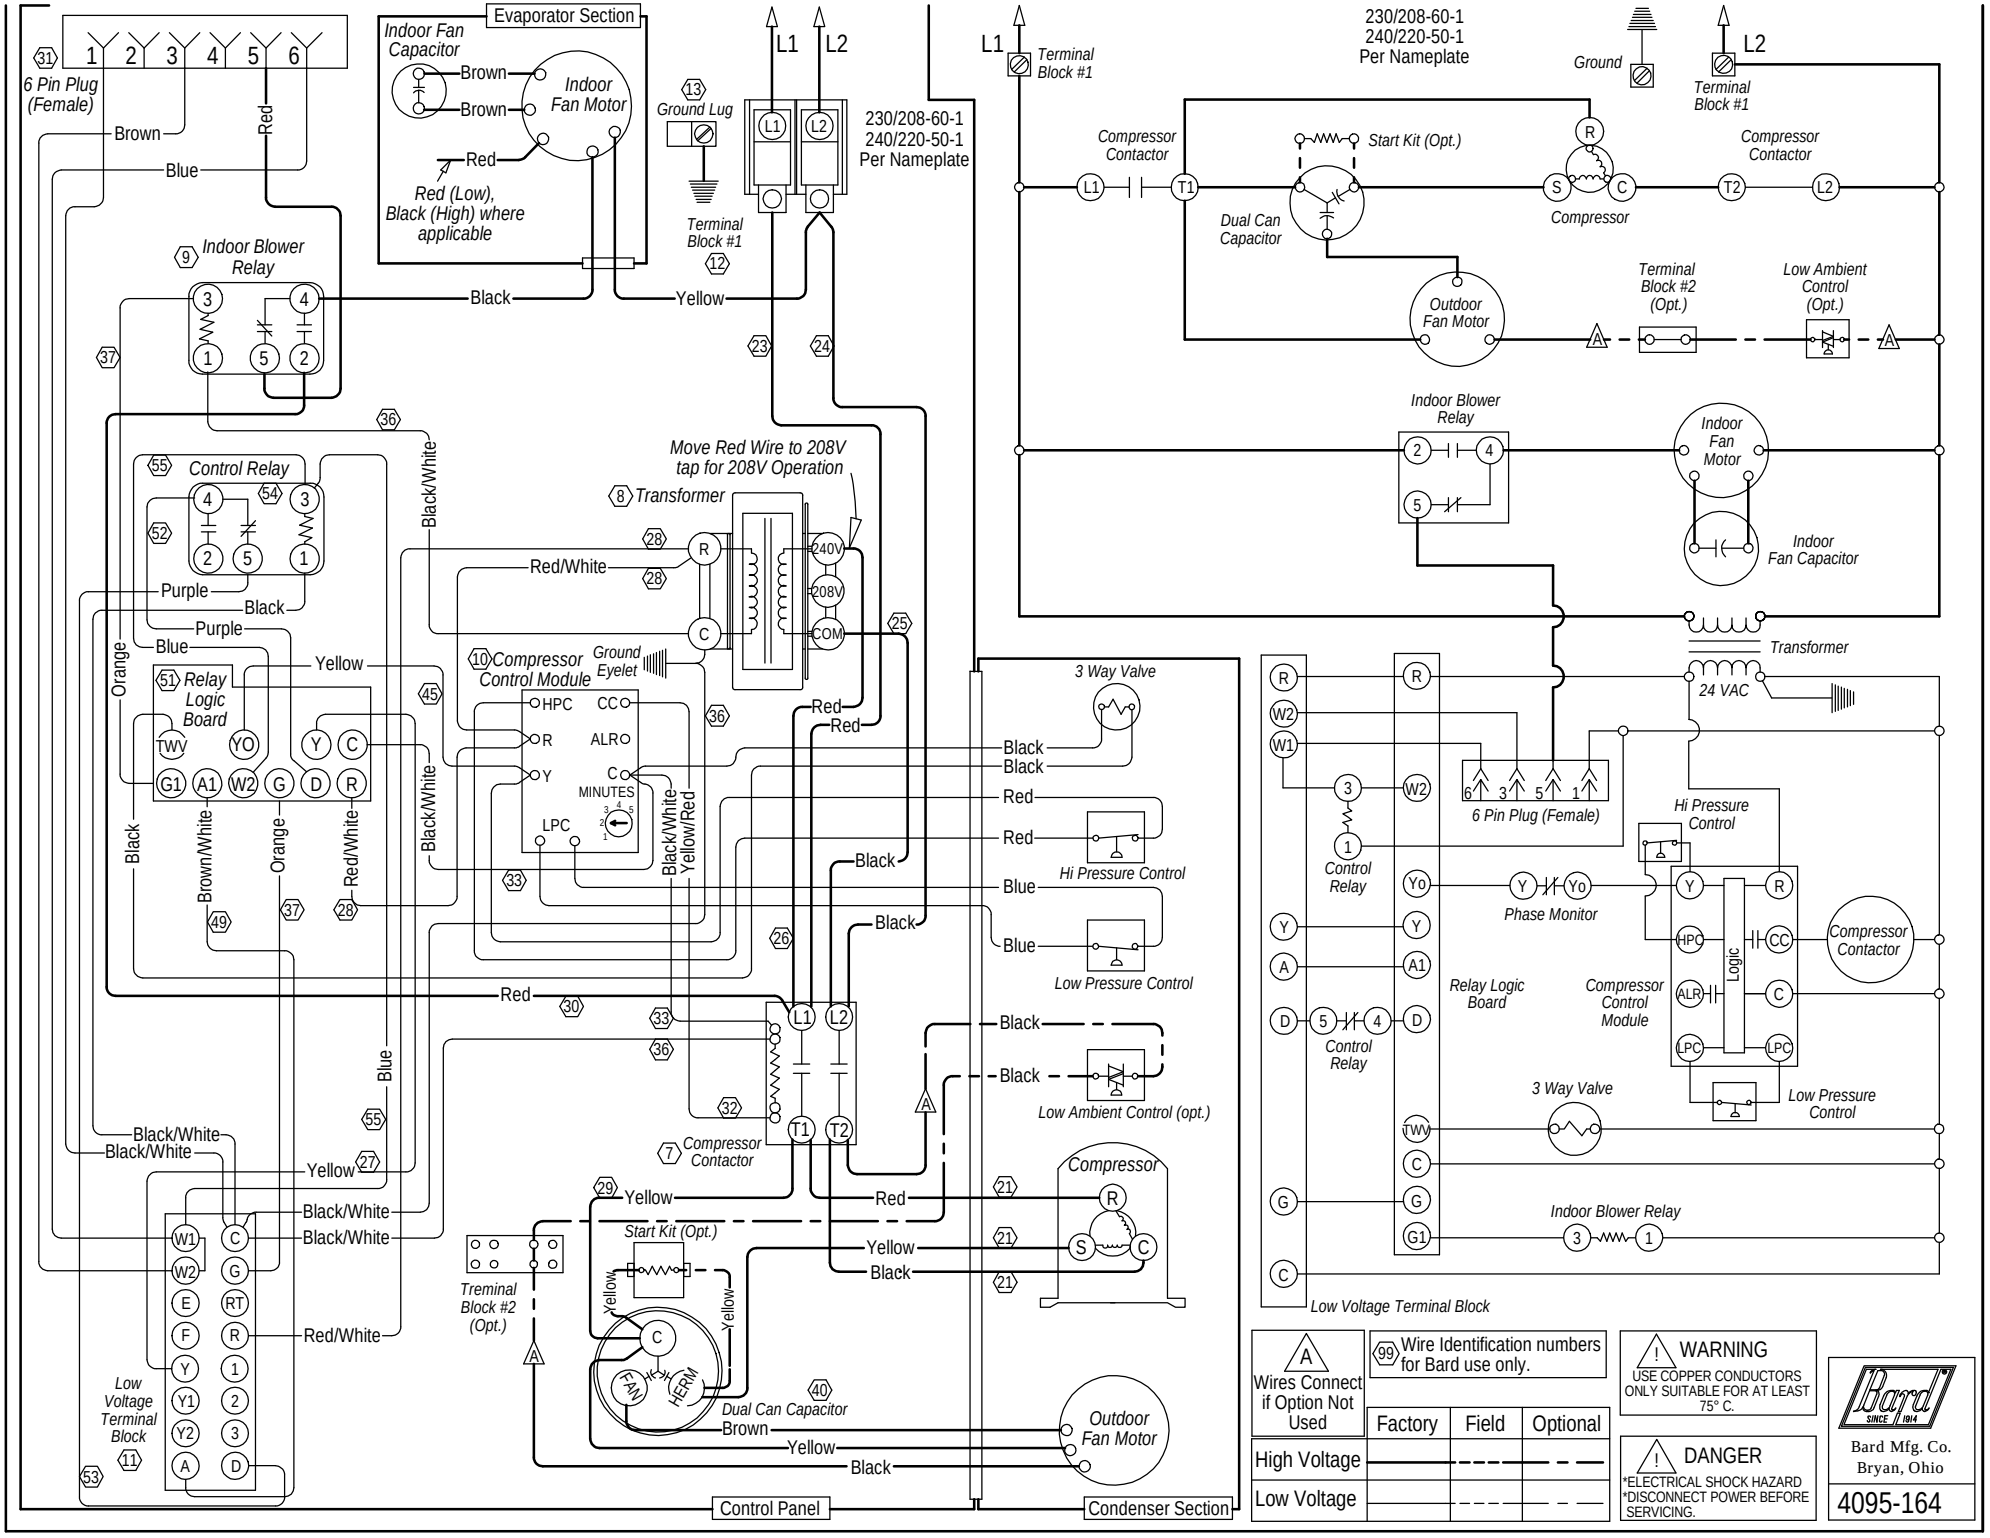

Evaporator Section
Control Panel
Condenser Section
6 Pin Plug (Female)
Indoor Fan Capacitor
Indoor Fan Motor
Red (Low), Black (High) where applicable
Ground Lug
Terminal Block #1
230/208-60-1
240/220-50-1
Per Nameplate
Indoor Blower Relay
Control Relay
Move Red Wire to 208V tap for 208V Operation
Transformer
240V
208V
COM
Compressor Control Module
Ground Eyelet
Relay Logic Board
HPC
CC
ALR
LPC
MINUTES
3 Way Valve
Hi Pressure Control
Low Pressure Control
Low Ambient Control (opt.)
Compressor Contactor
Compressor
Start Kit (Opt.)
Dual Can Capacitor
Outdoor Fan Motor
Terminal Block #2 (Opt.)
Low Ambient Control (opt.)
Low Voltage Terminal Block
Ground
Terminal Block #1
Compressor Contactor
Start Kit (Opt.)
Dual Can Capacitor
Compressor
Outdoor Fan Motor
Terminal Block #2 (Opt.)
Low Ambient Control (Opt.)
Indoor Blower Relay
Indoor Fan Motor
Indoor Fan Capacitor
Transformer
24 VAC
6 Pin Plug (Female)
Hi Pressure Control
Control Relay
Phase Monitor
Relay Logic Board
Compressor Control Module
Compressor Contactor
Logic
3 Way Valve
Low Pressure Control
Indoor Blower Relay
Low Voltage Terminal Block
Brown
Blue
Red
Black
Yellow
Purple
Orange
Red/White
Black/White
Brown/White
Red/White
Yellow/Red
Wires Connect if Option Not Used
Wire Identification numbers for Bard use only.
Factory
Field
Optional
High Voltage
Low Voltage
WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.
DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.
Bard Mfg. Co.
Bryan, Ohio
4095-164