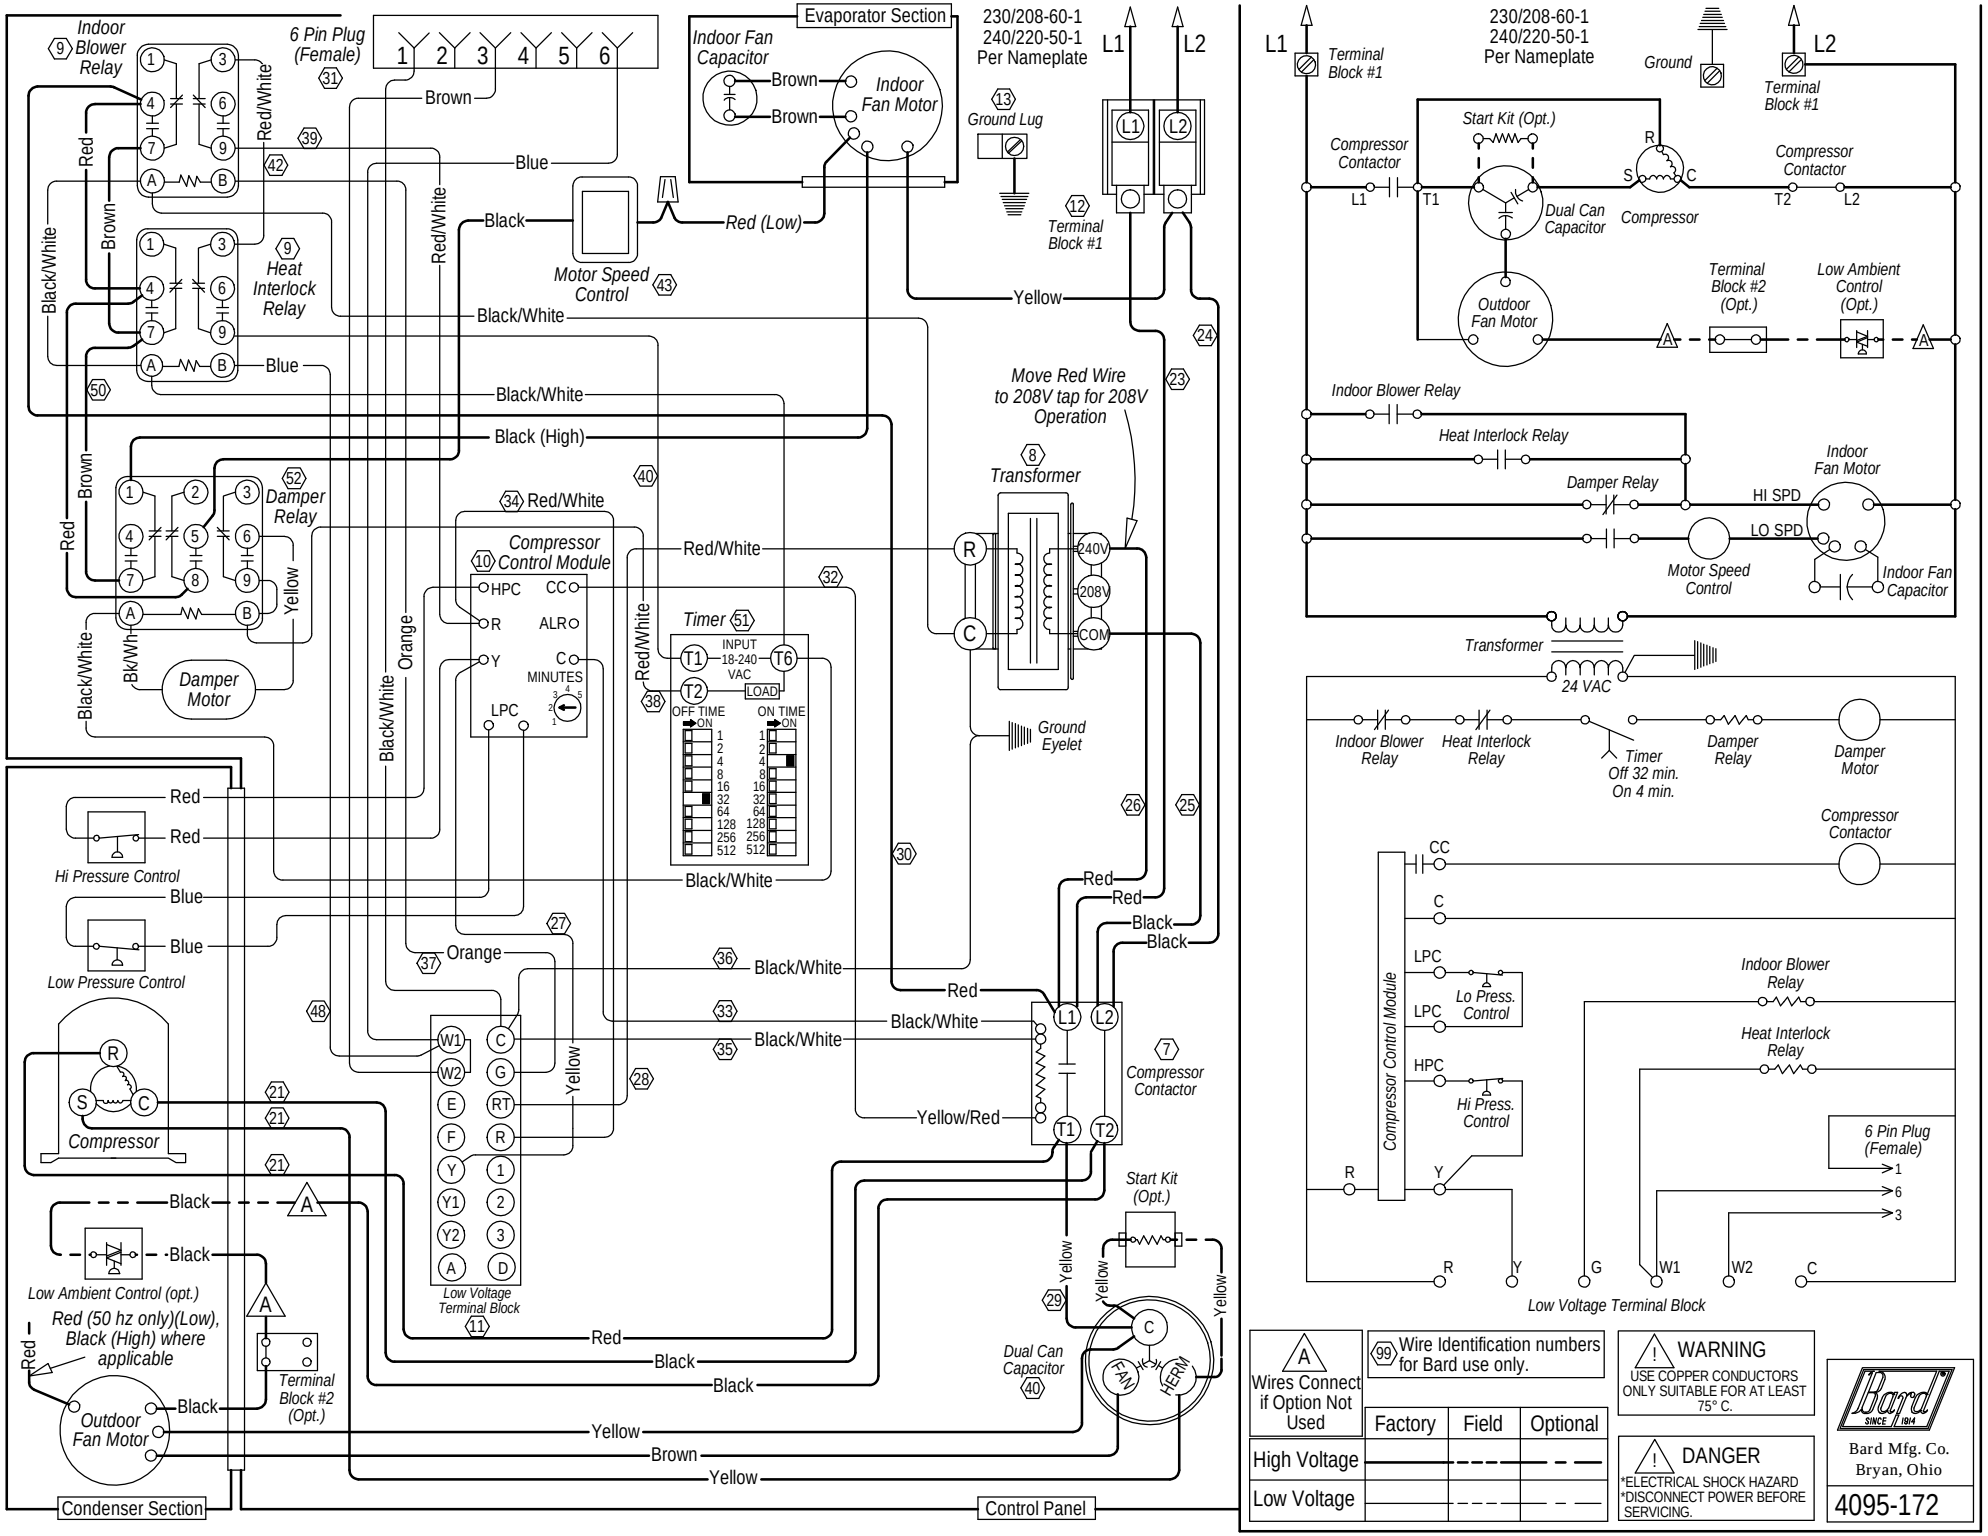
Indoor Blower Relay
6 Pin Plug (Female)
Evaporator Section
Indoor Fan Capacitor
Indoor Fan Motor
230/208-60-1
240/220-50-1
Per Nameplate
L1
L2
Ground Lug
Terminal Block #1
Heat Interlock Relay
Motor Speed Control
Move Red Wire to 208V tap for 208V Operation
Transformer
Damper Relay
Compressor Control Module
Timer
Ground Eyelet
Damper Motor
Hi Pressure Control
Low Pressure Control
Compressor
Compressor Contactor
Low Voltage Terminal Block
Low Ambient Control (opt.)
Red (50 hz only)(Low), Black (High) where applicable
Outdoor Fan Motor
Terminal Block #2 (Opt.)
Start Kit (Opt.)
Dual Can Capacitor
Condenser Section
Control Panel
Ground
Compressor Contactor
Dual Can Capacitor
Compressor
Low Ambient Control (Opt.)
24 VAC
Lo Press. Control
Hi Press. Control
Wires Connect if Option Not Used
Wire Identification numbers for Bard use only.
WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.
DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.
Factory
Field
Optional
High Voltage
Low Voltage
Bard Mfg. Co.
Bryan, Ohio
4095-172