Bard Mfg. Co.
Bryan, Ohio

4100C119 B

WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.

	Factory	Field	Optional
High Voltage	———	- - - -	— - —
Low Voltage	———	- - - -	— - —
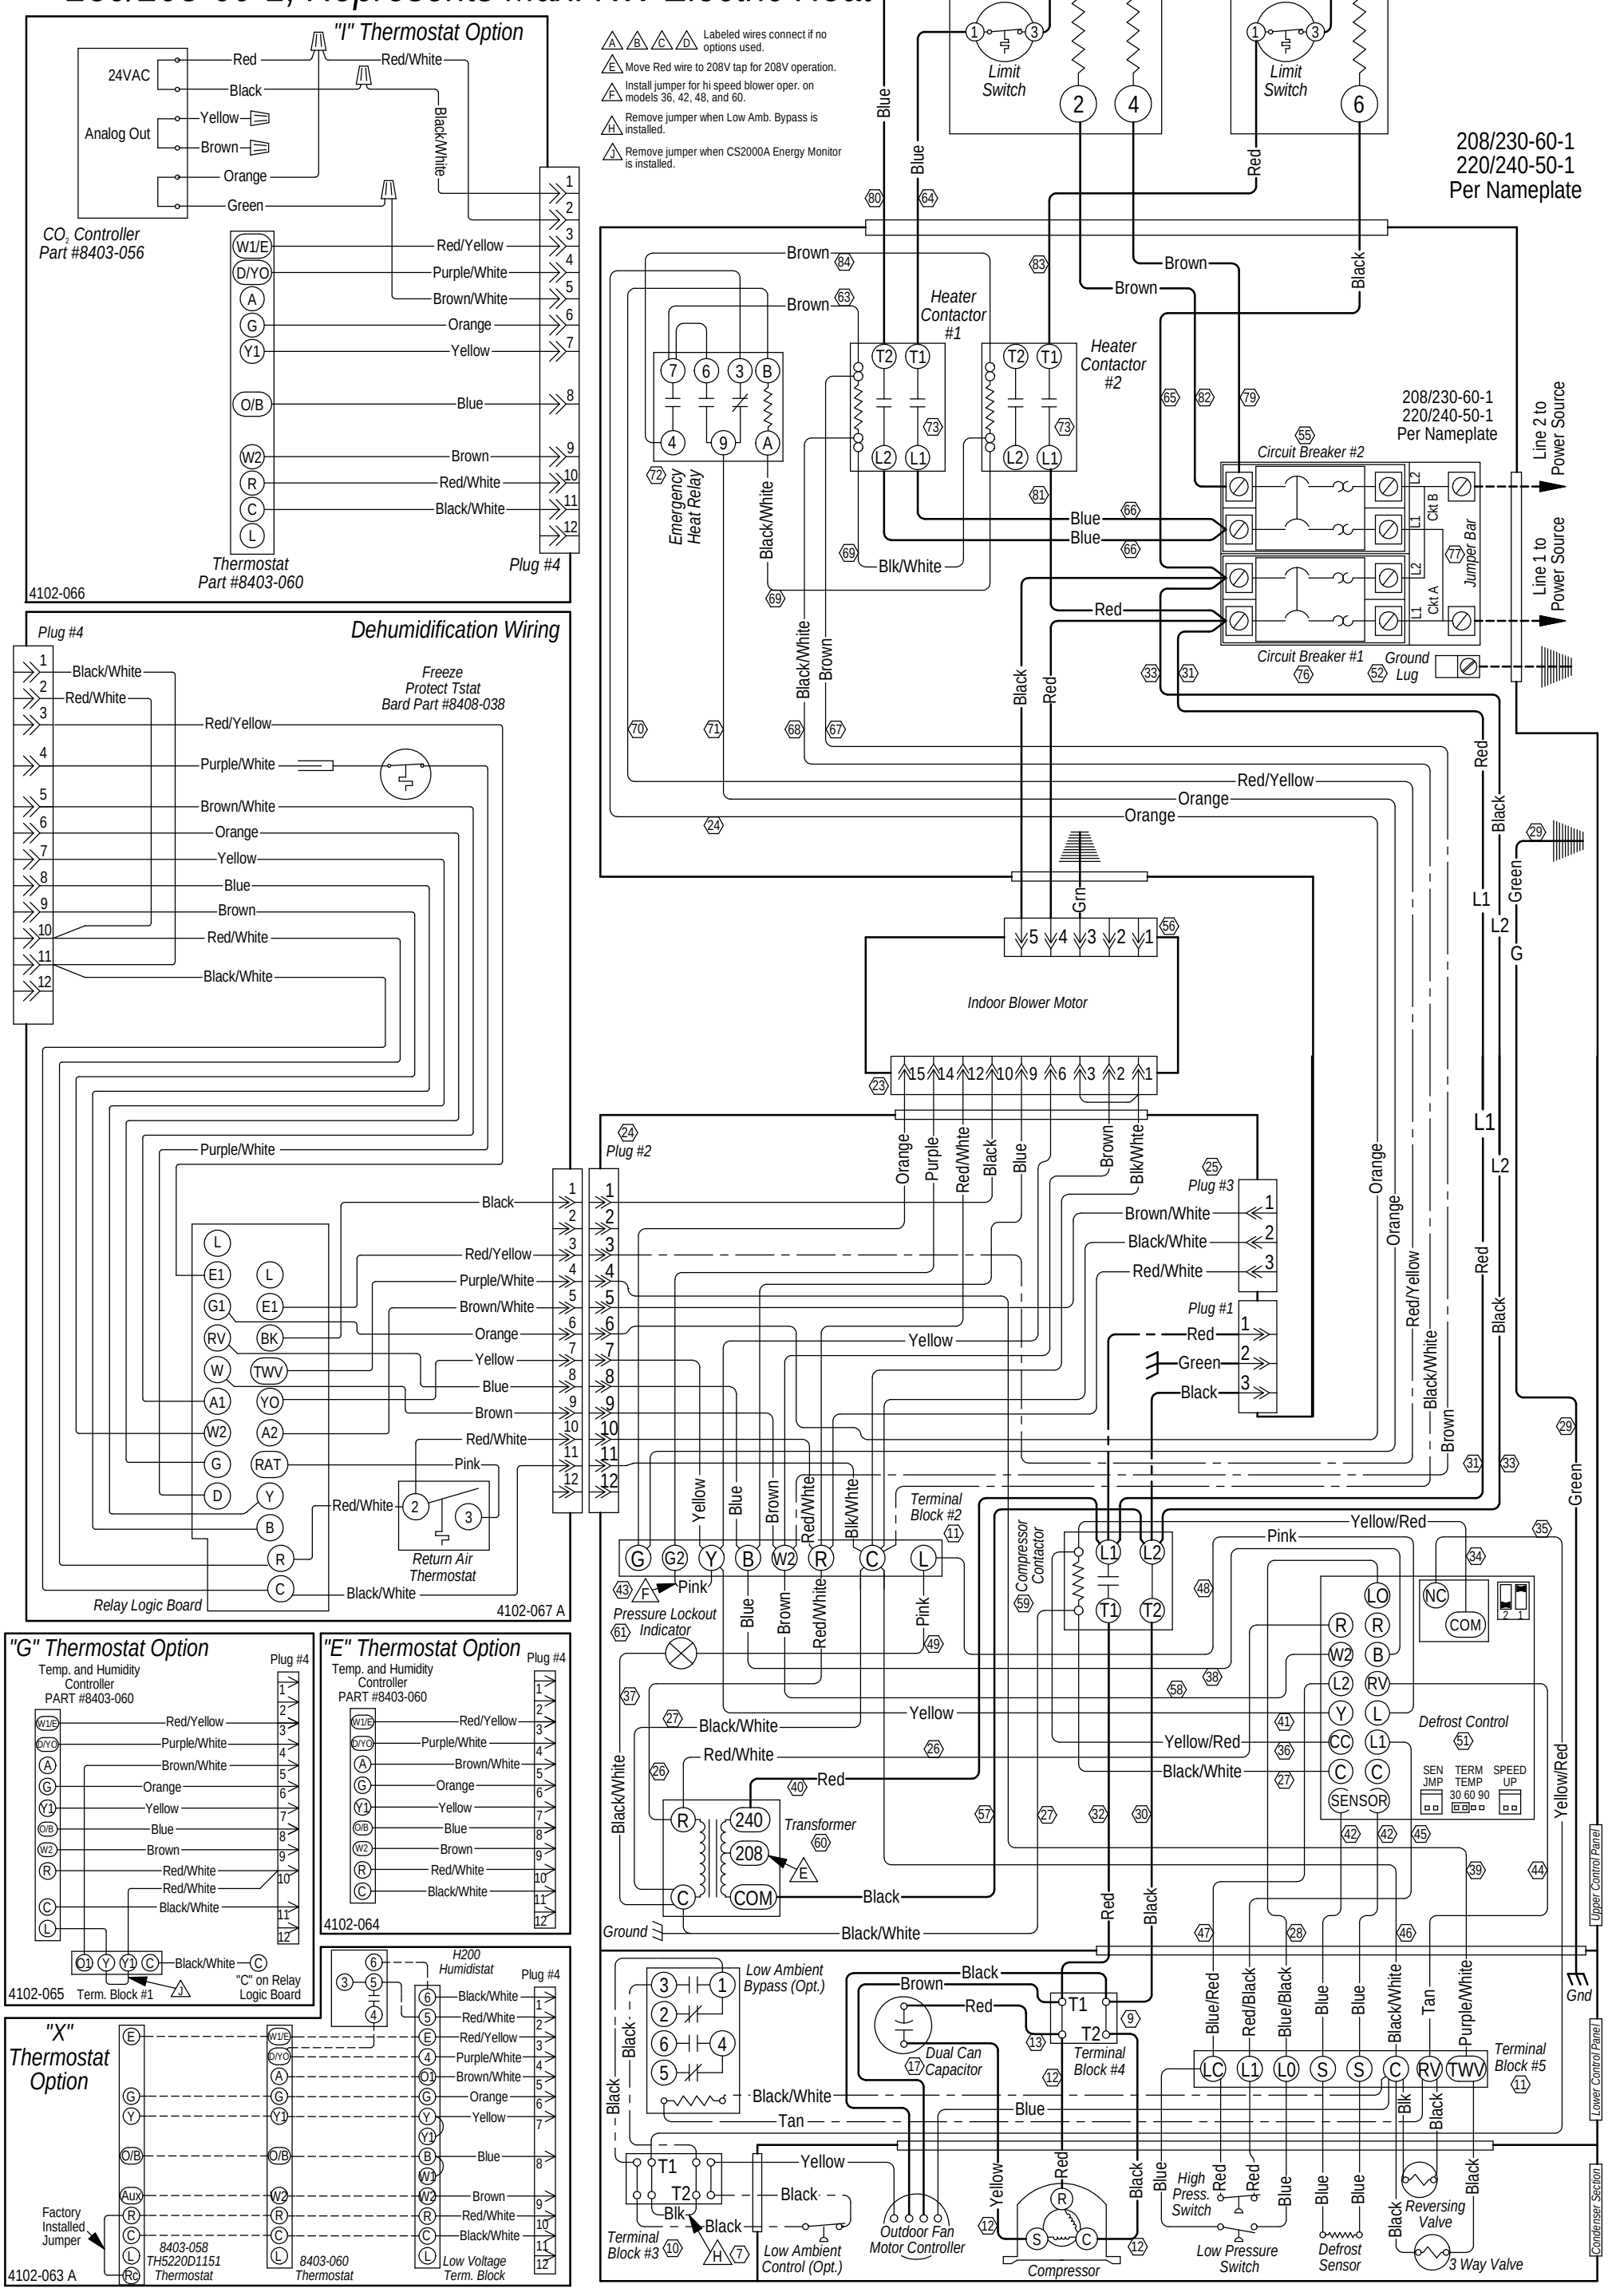
Composite Wiring Diagram QH Series 3 230/208-60-1, Represents Max. KW Electric Heat