

4100C122 A


**WARNING**
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

**DANGER**
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE
SERVICING.

	Factory	Field	Optional
High Voltage		-----	-----
Low Voltage		-----	-----

Composite Wiring Diagram QH Series 3

230/208-60-1, Represents Max. KW Electric Heat

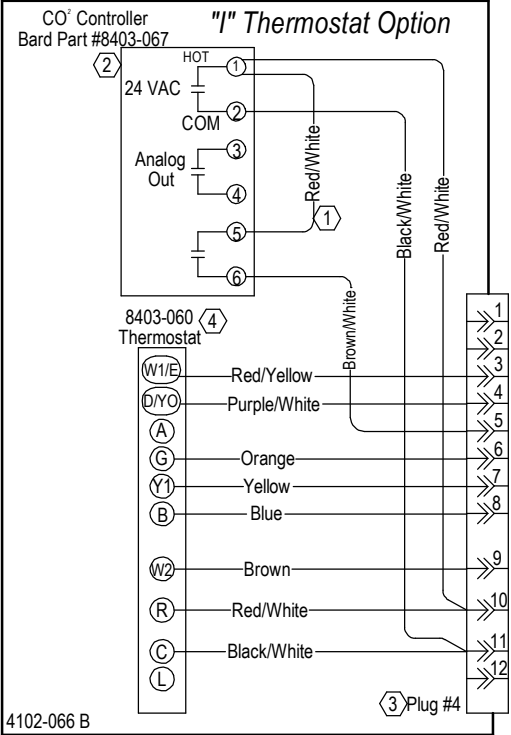

- Labeled wires connect if no options used.**
- E** Move Red wire to 208V tap for 208V operation.
 - F** Install jumper for hi speed blower oper. on models 36, 42, 48, and 60.
 - H** Remove jumper when Low Amb. Bypass is installed.

