Bard Mfg. Co.
Bryan, Ohio

4100C319 A

WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.

	Factory	Field	Optional
High Voltage			
Low Voltage			
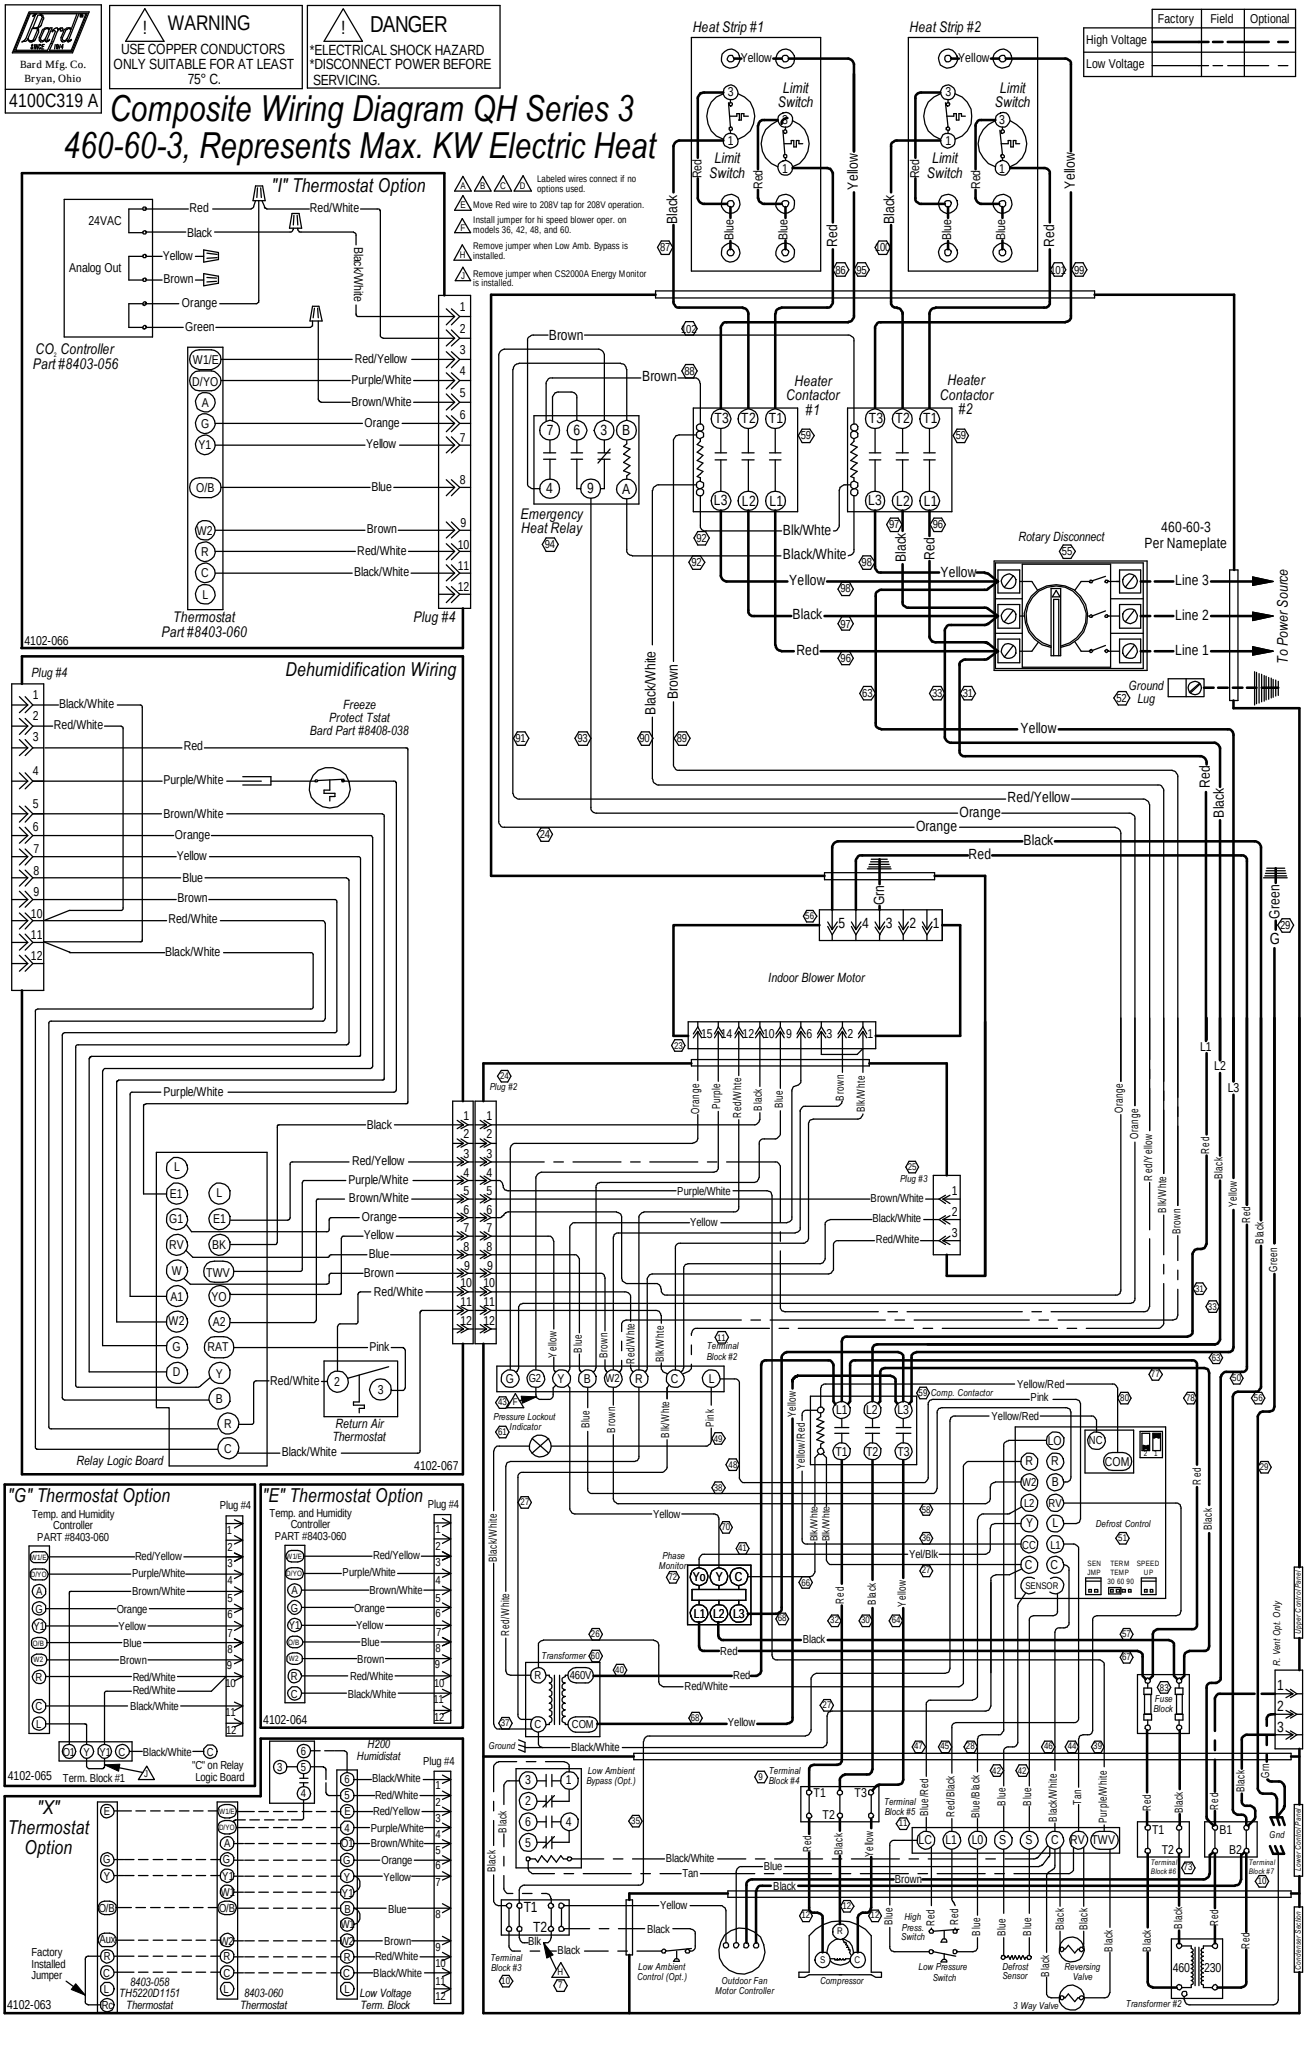
Composite Wiring Diagram QH Series 3
460-60-3, Represents Max. KW Electric Heat