

Bard Mfg. Co.
Bryan, Ohio

4100C319 B



WARNING







USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.



DANGER

*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE
SERVICING.

319 B Composite Wiring Diagram QH Series 3
460-60-3, Represents Max. KW Electric Heat

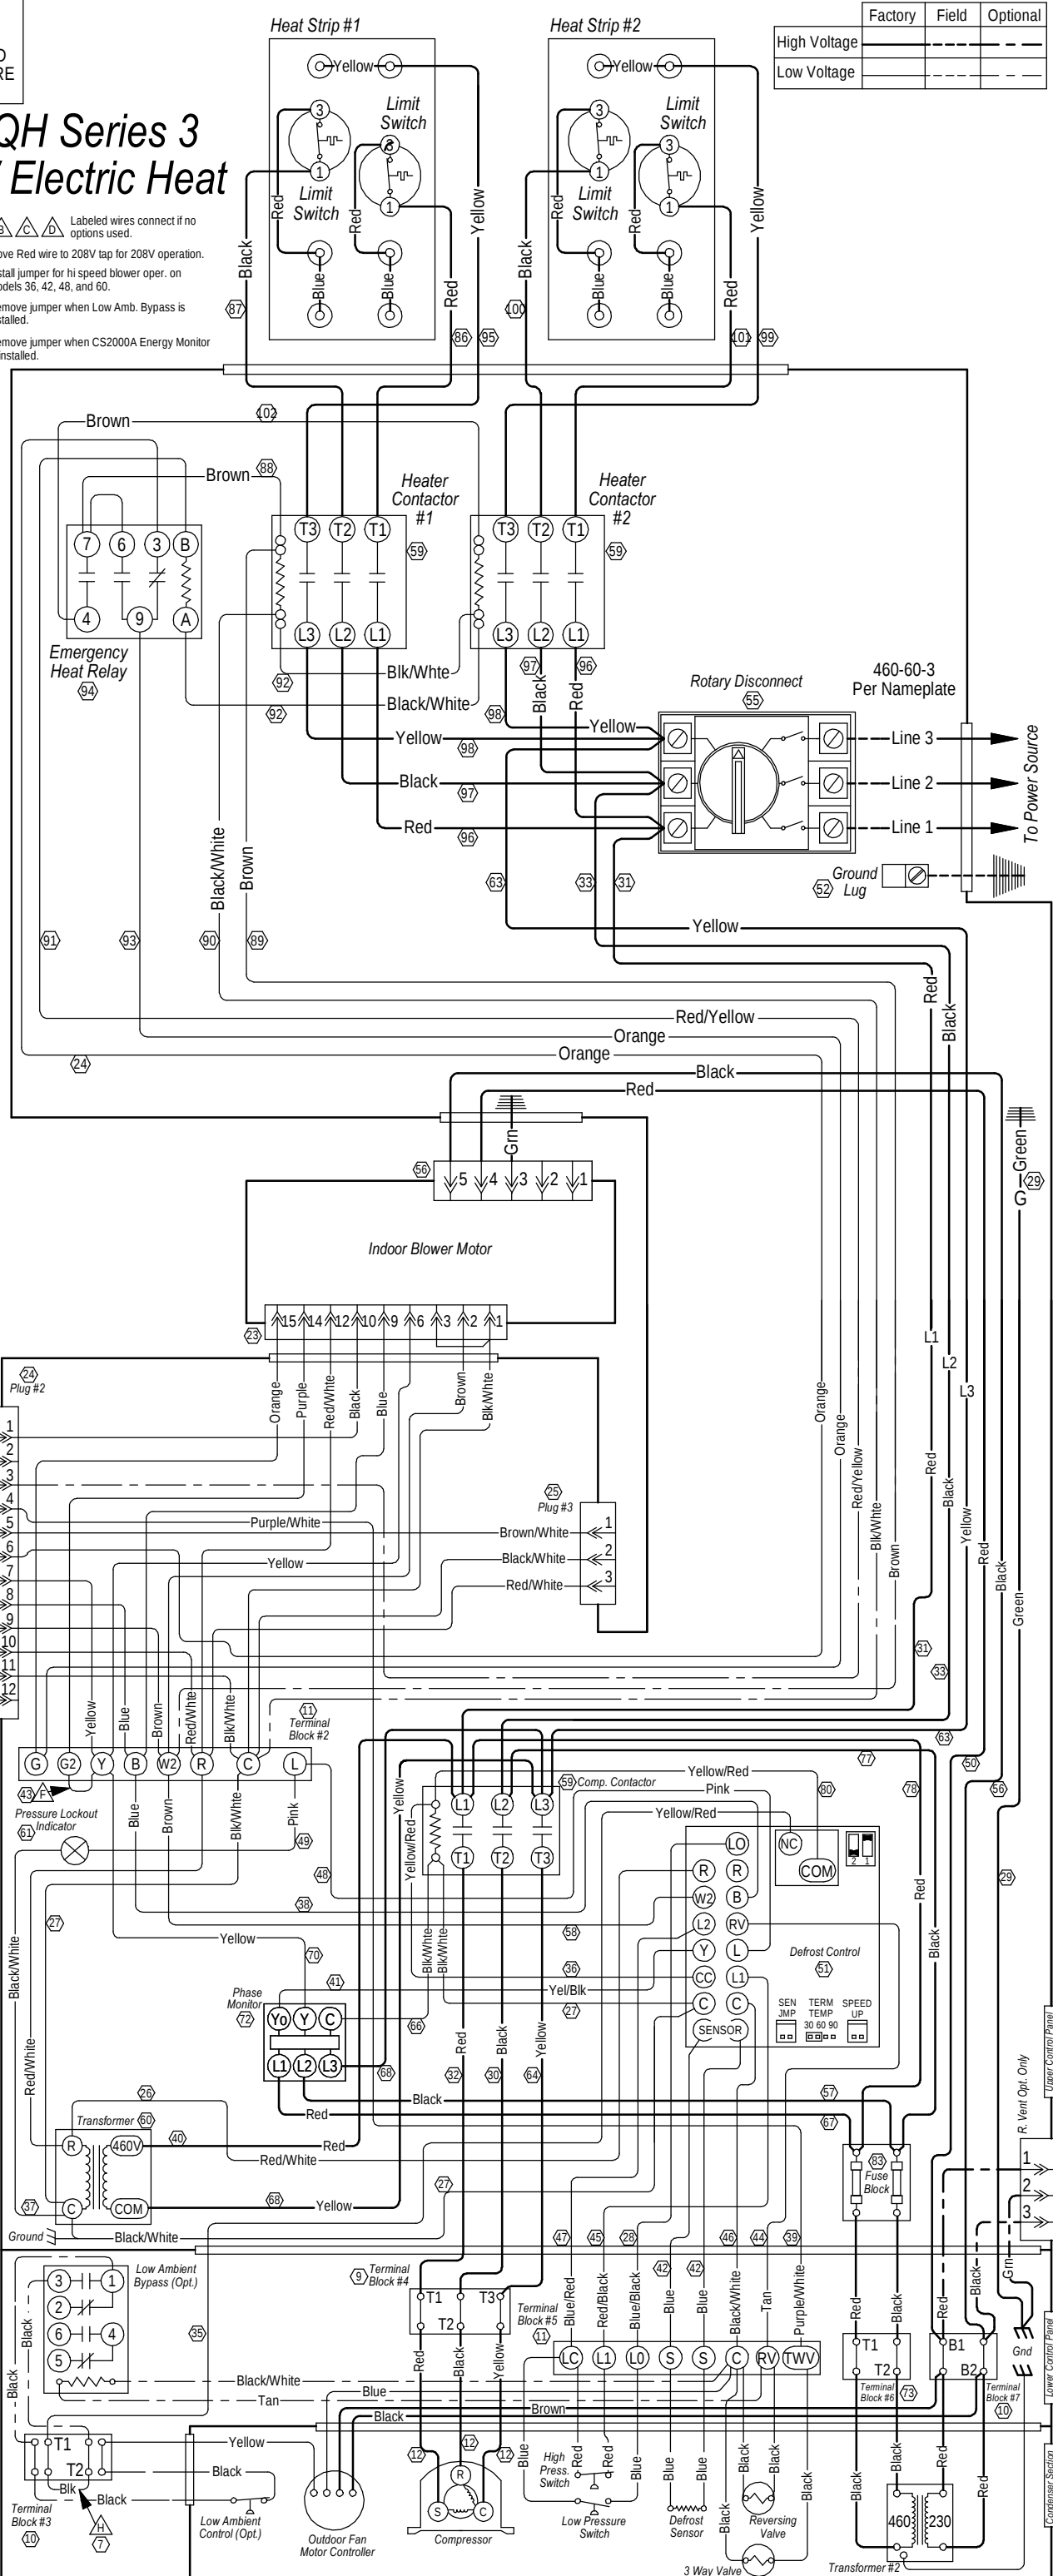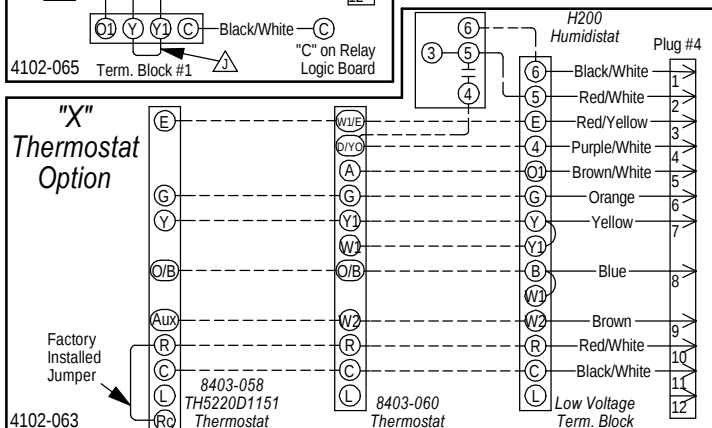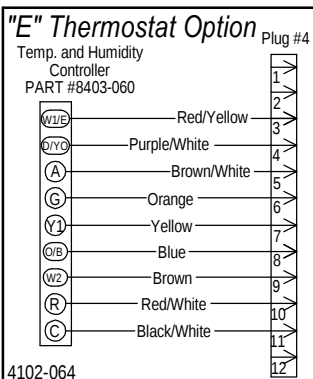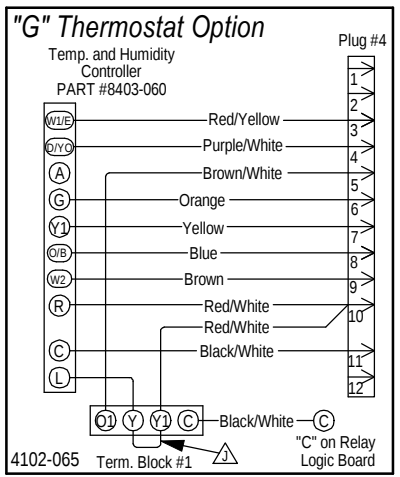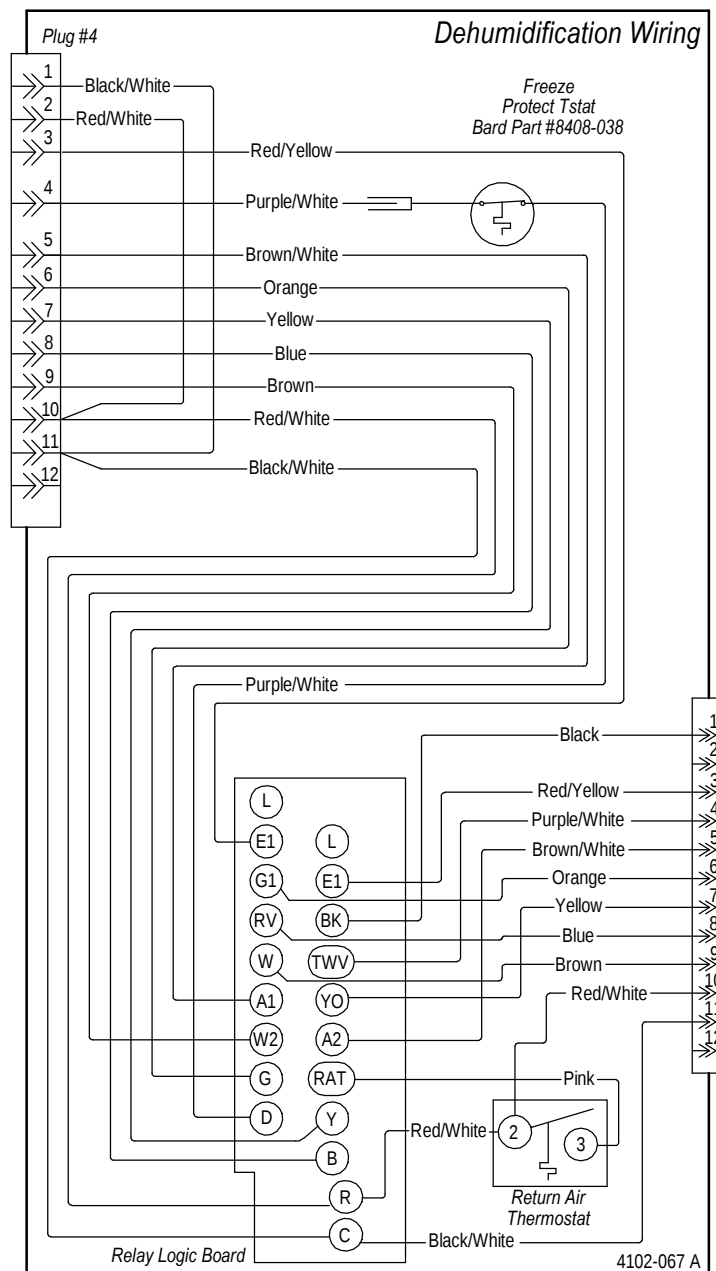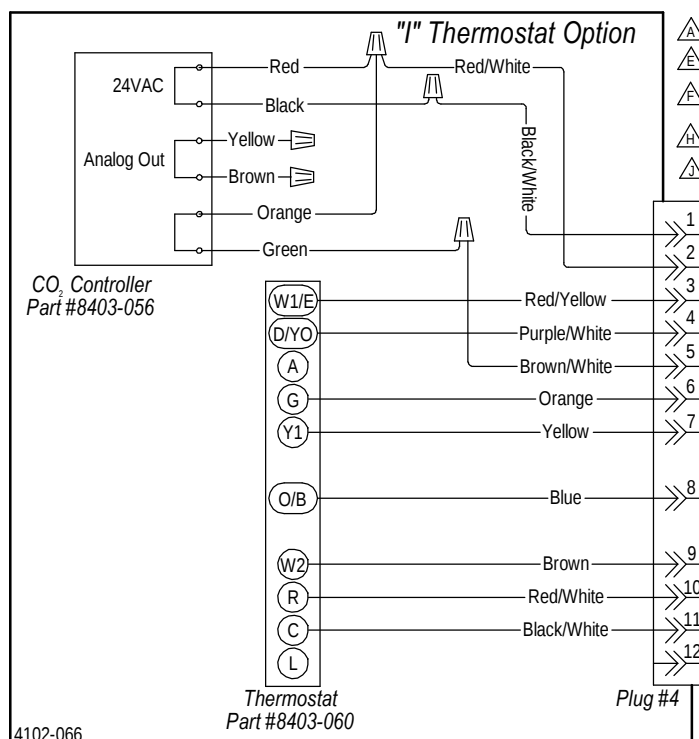

	Factory	Field	Optional
High Voltage		---	---
Low Voltage		---	---