


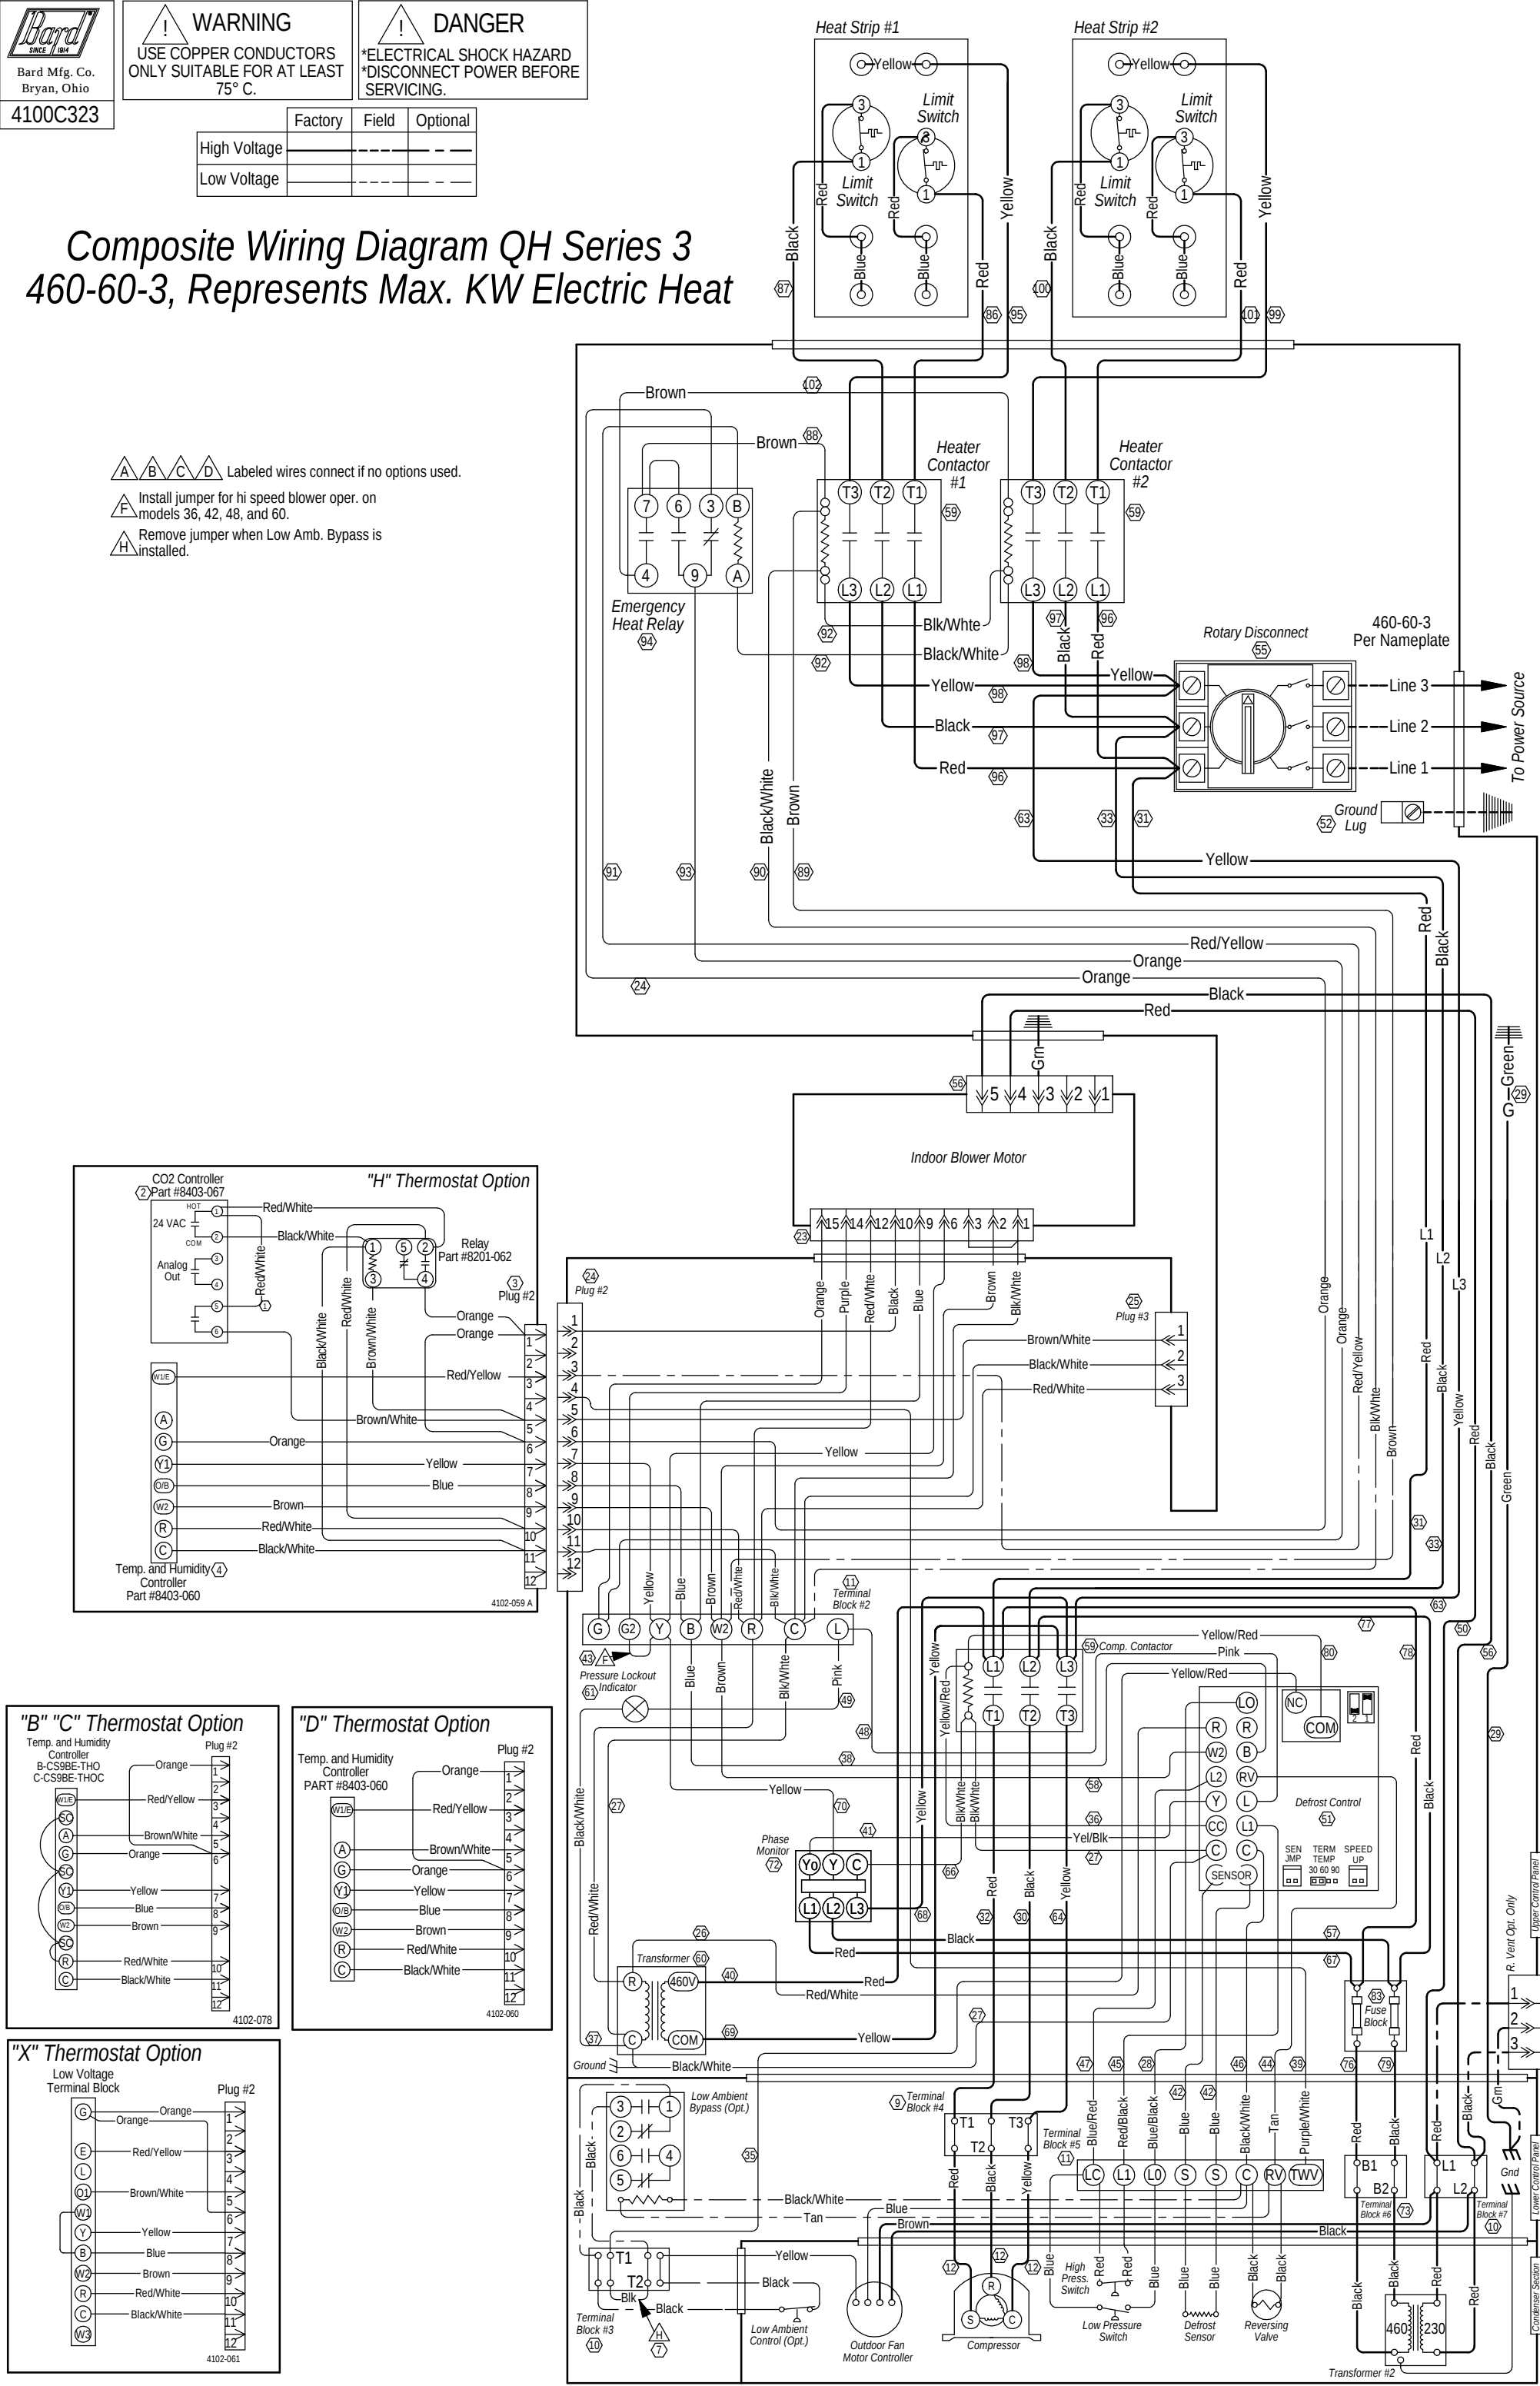

Composite Wiring Diagram QH Series 3

460-60-3, Represents Max. KW Electric Heat

A

B

C

D

Labeled wires connect if no options used.

F

Install jumper for hi speed blower oper. on models 36, 42, 48, and 60.

H

Remove jumper when Low Amb. Bypass is installed.

Heat Strip #1

Heat Strip #2

Emergency Heat Relay

Heater Contactor #1

Heater Contactor #2

Rotary Disconnect

460-60-3 Per Nameplate

Indoor Blower Motor

Defrost Control

Compressor

Outdoor Fan Motor Controller

"H" Thermostat Option

"B" "C" Thermostat Option

"D" Thermostat Option

"X" Thermostat Option

Pressure Lockout Indicator

Phase Monitor

Low Ambient Bypass (Opt.)

Low Ambient Control (Opt.)

Transformer #1

Transformer #2

Line 3

Line 2

Line 1

Ground Lug

To Power Source

Gnd