



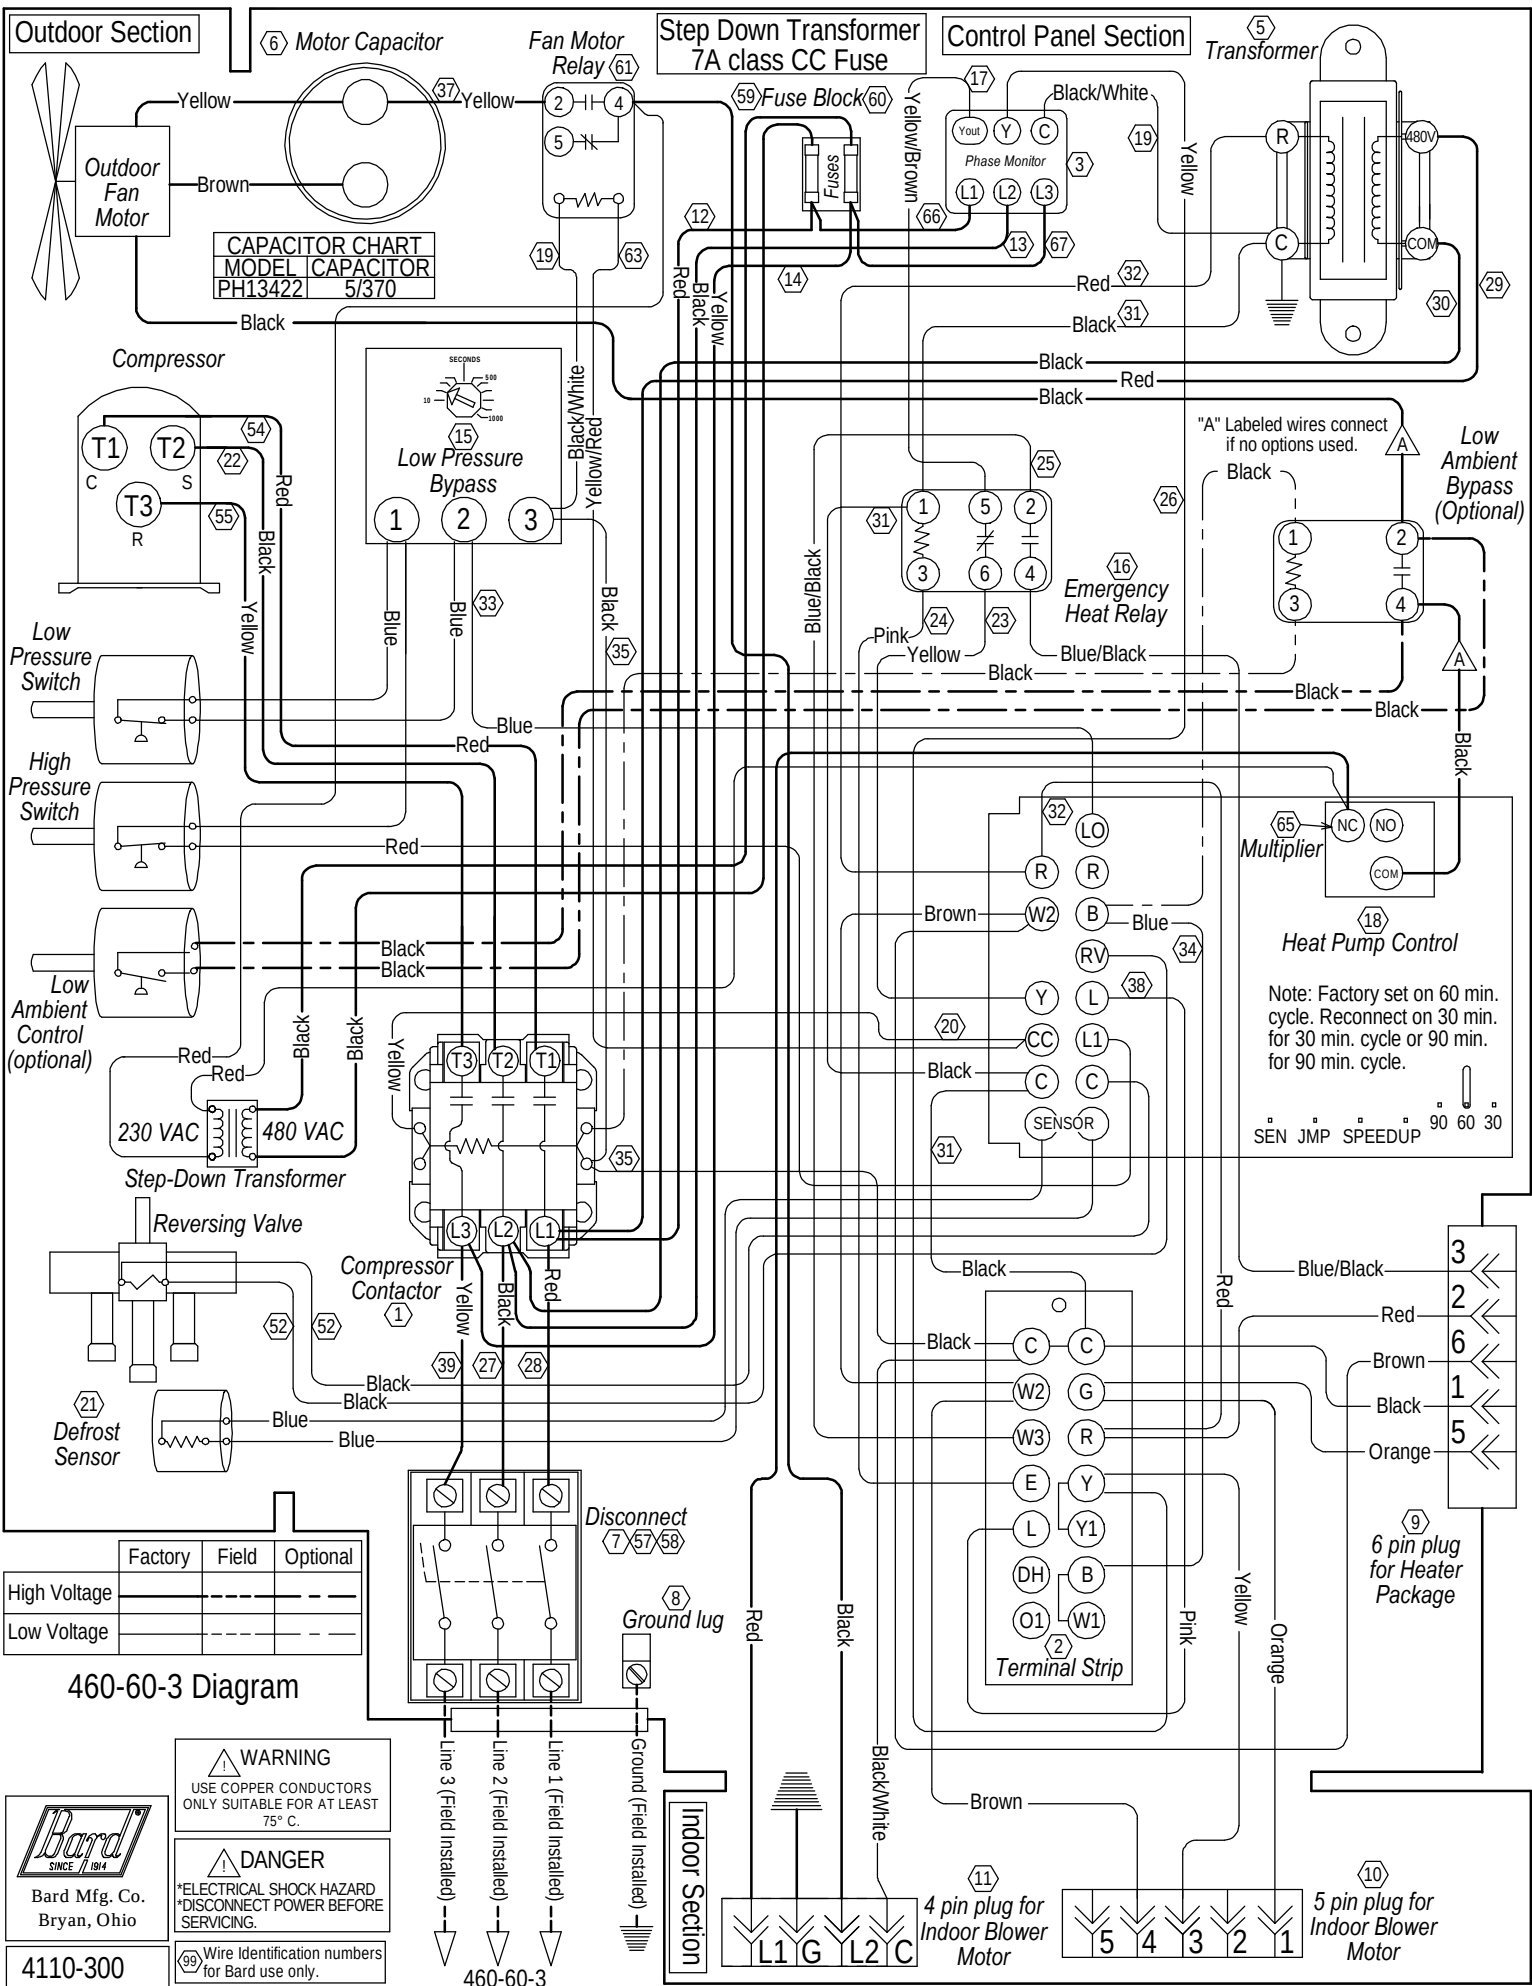

CAPACITOR CHART

MODEL	CAPACITOR
PH13422	5/370



Note: Factory set on 60 min. cycle. Reconnect on 30 min. for 30 min. cycle or 90 min. for 90 min. cycle.

SEN JMP SPEEDUP 90 60 30

	Factory	Field	Optional
High Voltage			
Low Voltage			

460-60-3 Diagram



Bard Mfg. Co.
Bryan, Ohio

4110-300

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE
SERVICING.

Wire identification numbers
for Bard use only.

