


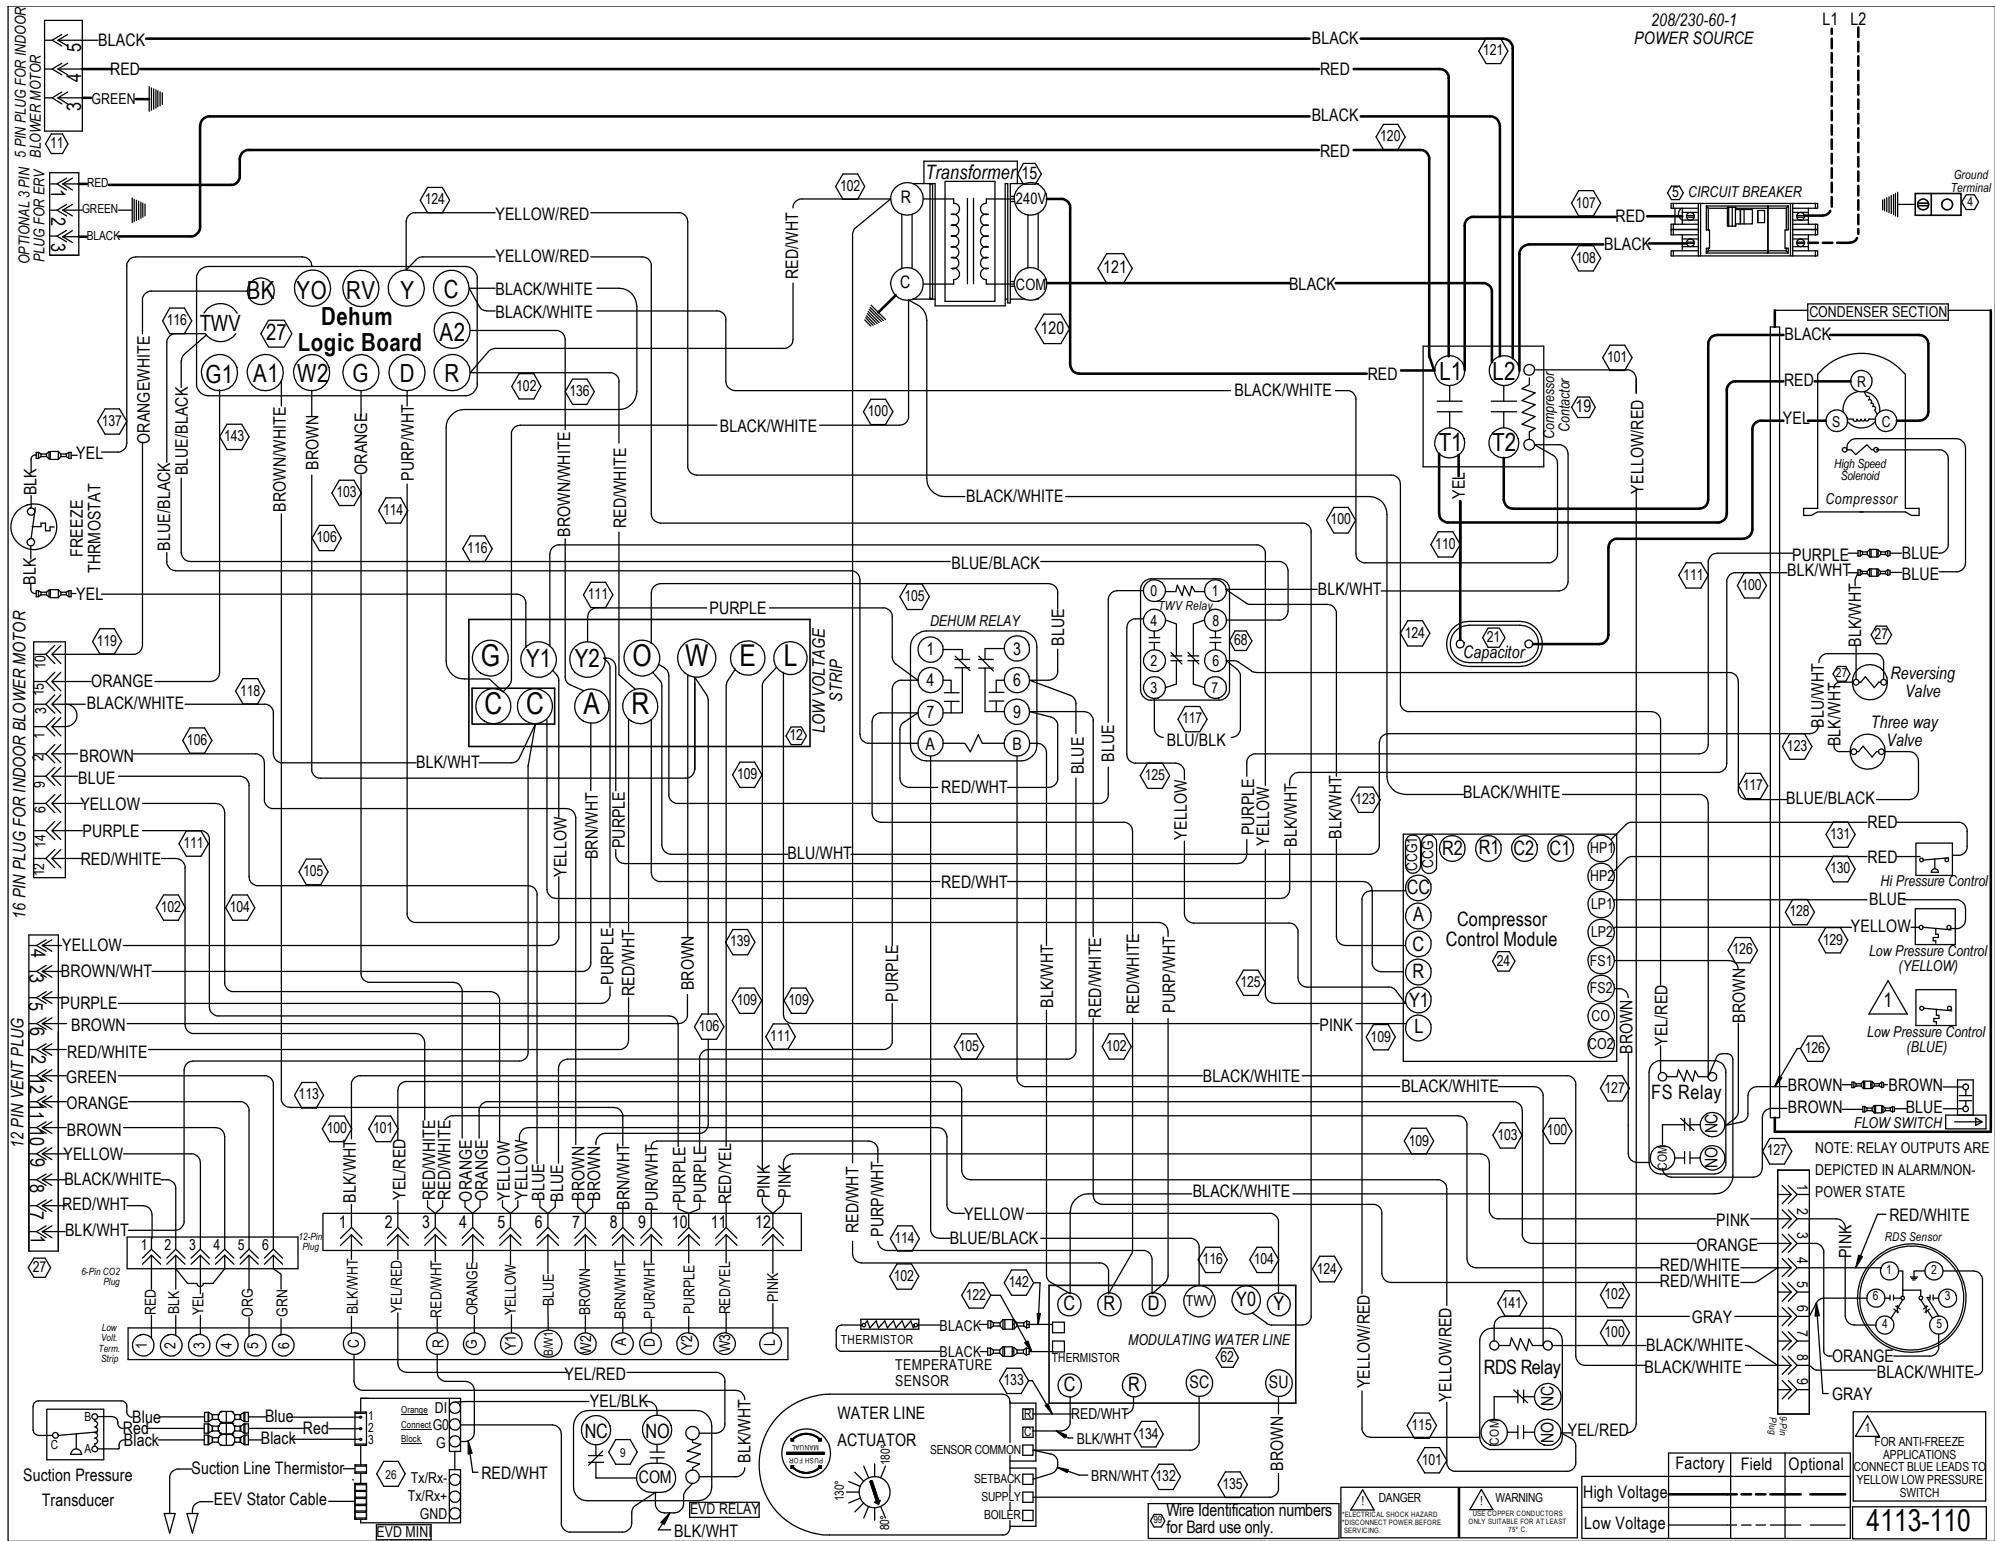

208/230-60-1
POWER SOURCE

CONDENSER SECTION

BLACK

RED

YEL

High Speed Solenoid

Compressor

PURPLE

BLK/WHT

BLUE

Reversing Valve

Three Way Valve

BLUE/BLACK

RED

RED

Hi Pressure Control

BLUE

YELLOW

Low Pressure Control (YELLOW)

Low Pressure Control (BLUE)

NOTE: RELAY OUTPUTS ARE
DEPICTED IN ALARM/NON-
POWER STATE

RED/WHITE

RDS Sensor

ORANGE

BLACK/WHITE

GRAY

Factory

Field

Optional

High Voltage

Low Voltage

4113-110

FOR ANTI-FREEZE
APPLICATIONS
CONNECT BLUE LEADS TO
YELLOW LOW PRESSURE
SWITCH

Wire Identification numbers
for Bard use only.

WARNING
ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE
SERVICING.

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

130°

80°

WATER LINE
ACTUATOR

TEMPERATURE
SENSOR

MODULATING WATER LINE

TEMPERATURE
SENSOR

SETBACK
SUPPLY
BOILER

RED/WHITE

BLK/WHT

YEL/BLK

NC

COM

NO

YEL/RED

RED/WHITE

ORANGE

GRAY

BLACK/WHITE

BLACK/WHITE

GRAY

RED/WHITE

ORANGE

BLACK/WHITE

GRAY

RED/WHITE

ORANGE

BLACK/WHITE

GRAY

RED/WHITE

ORANGE

BLACK/WHITE

GRAY