


208/240-60-1 Line Power Per Nameplate

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE
SERVICING.

GROUND
TERMINAL




CIRCUIT BREAKER ²⁹

BLACK/WHITE
BROWN

RED/WHITE
ORANGE

Unit Model Number	Single Circuit Breaker Size	Compressor Capacitor
I30H1-A05	50A	40/370
I36H1-A05	60A	40/370
I36Z1-A05	50A	40/370
I42H1-A05	60A	45/370
I48H1-A04	60A	40/440
I48Z1-A04	60A	30/370

Unit Model Number	Single Circuit Breaker Size	Compressor Capacitor
I30A1DA05	35A	40/370
I36A1DA05	40A	40/370
I42A1DA05	45A	45/370
I48A1DA05	50A	30/370
I60A1DA05	60A	40/440

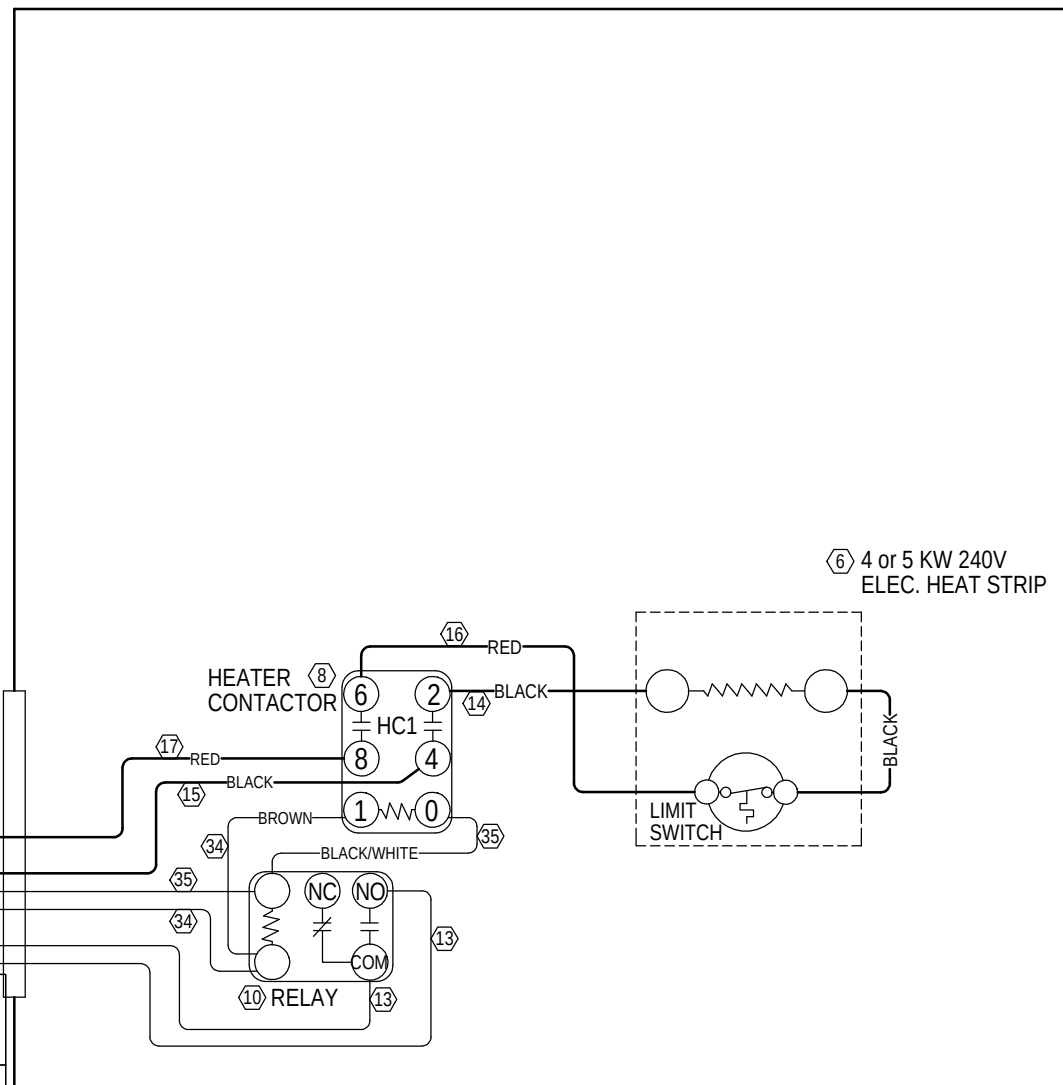

2 THIS WIRE IS TAPED-OFF IN LOW VOLTAGE TERMINAL BOX. SEE LOW VOLTAGE WIRING SECTION IN INSTALLATION MANUAL.

1 FOR 208 VOLT OPERATION, MOVE THIS RED WIRE TO 208 VOLT TRANSFORMER TAP

⁹⁹ Wire Identification numbers for Bard use only.

	Factory	Field	Optional
High Voltage			
Low Voltage			