


WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.


DANGER
ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE
SERVICING.

GROUND
TERMINAL

CIRCUIT BREAKER 26

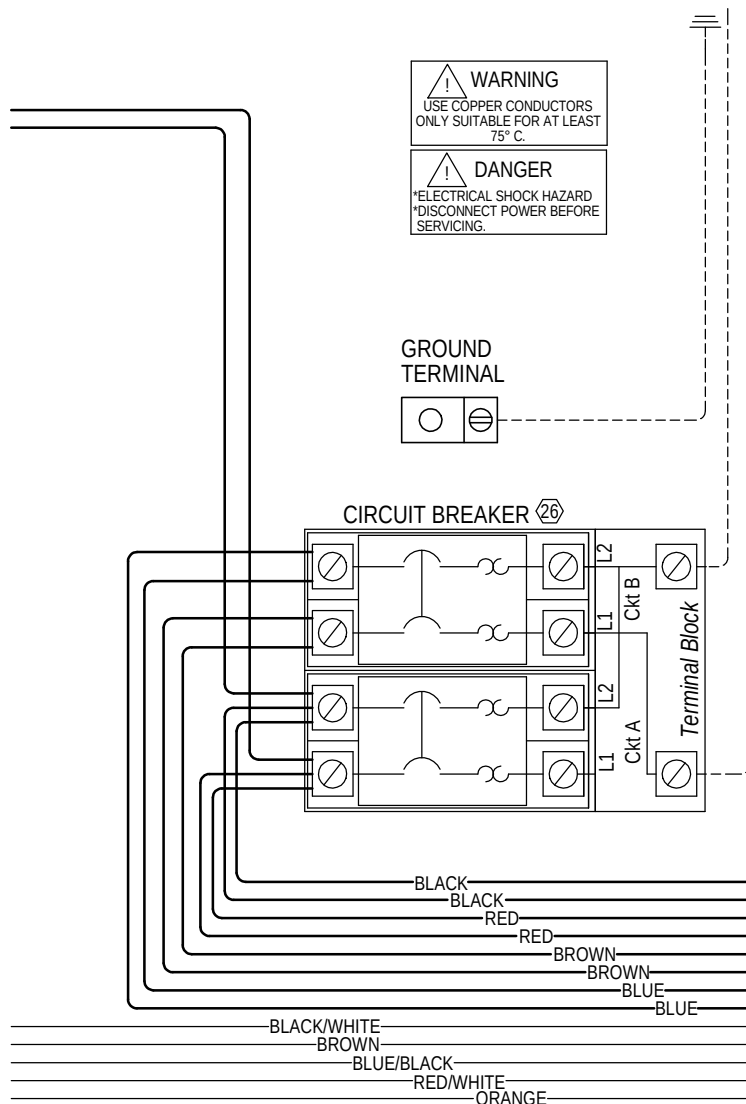

208/240-60-1 Line Power Per Nameplate

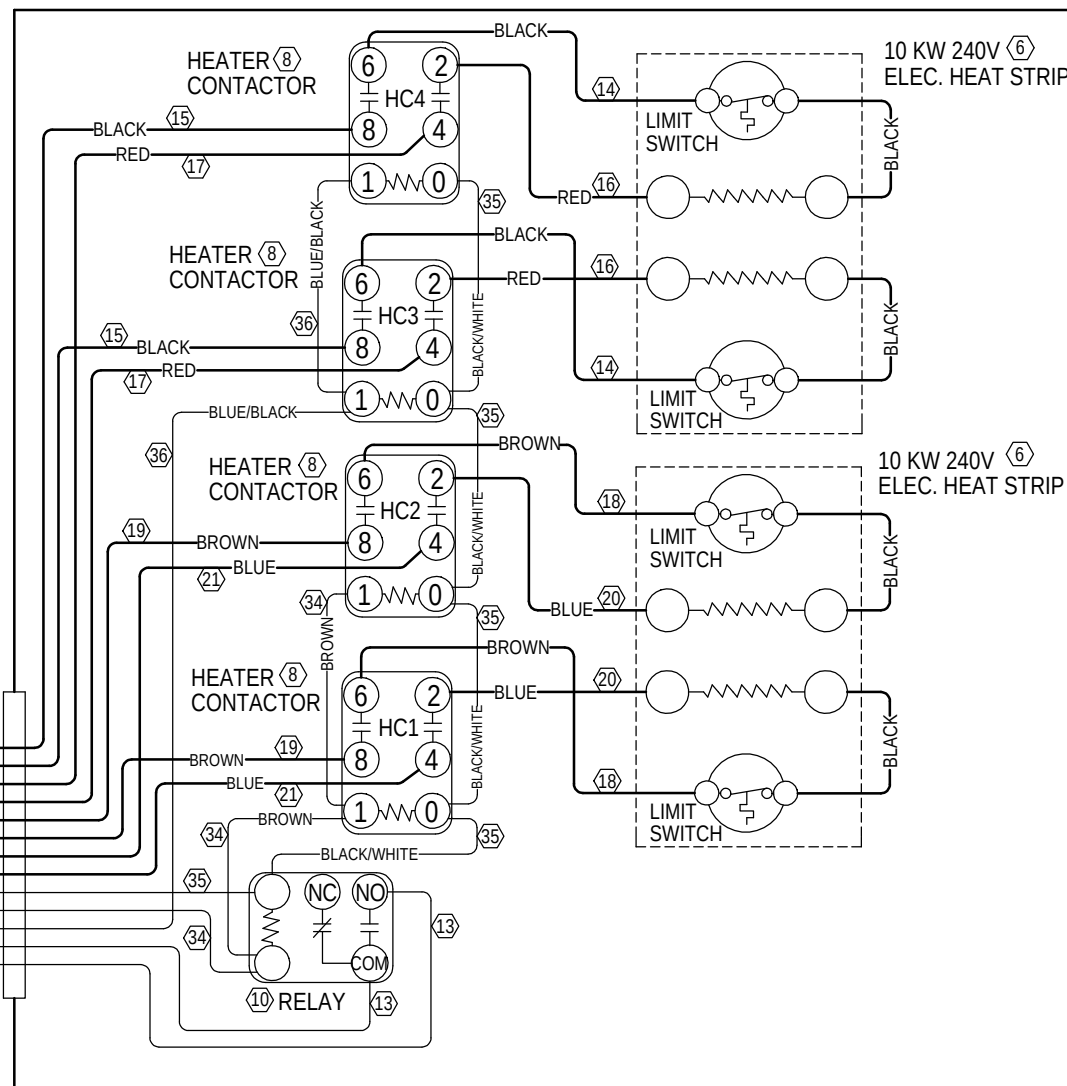

Unit Model Number	Single Circuit Breaker Size	Dual Circuit Breaker Size		Compressor Capacitor
		CKT. A	CKT. B	
I48H1-A20	110A	60 A	60 A	30/370
I60H1-A20	120A	60 A	60 A	40/440

2 THIS WIRE IS TAPED-OFF IN
LOW VOLTAGE TERMINAL BOX.
SEE LOW VOLTAGE WIRING SECTION
IN INSTALLATION MANUAL.

1 FOR 208 VOLT OPERATION,
MOVE THIS RED WIRE TO
208 VOLT TRANSFORMER TAP

99 Wire Identification numbers
for Bard use only.

	Factory	Field	Optional
High Voltage			
Low Voltage			



4203-105 A