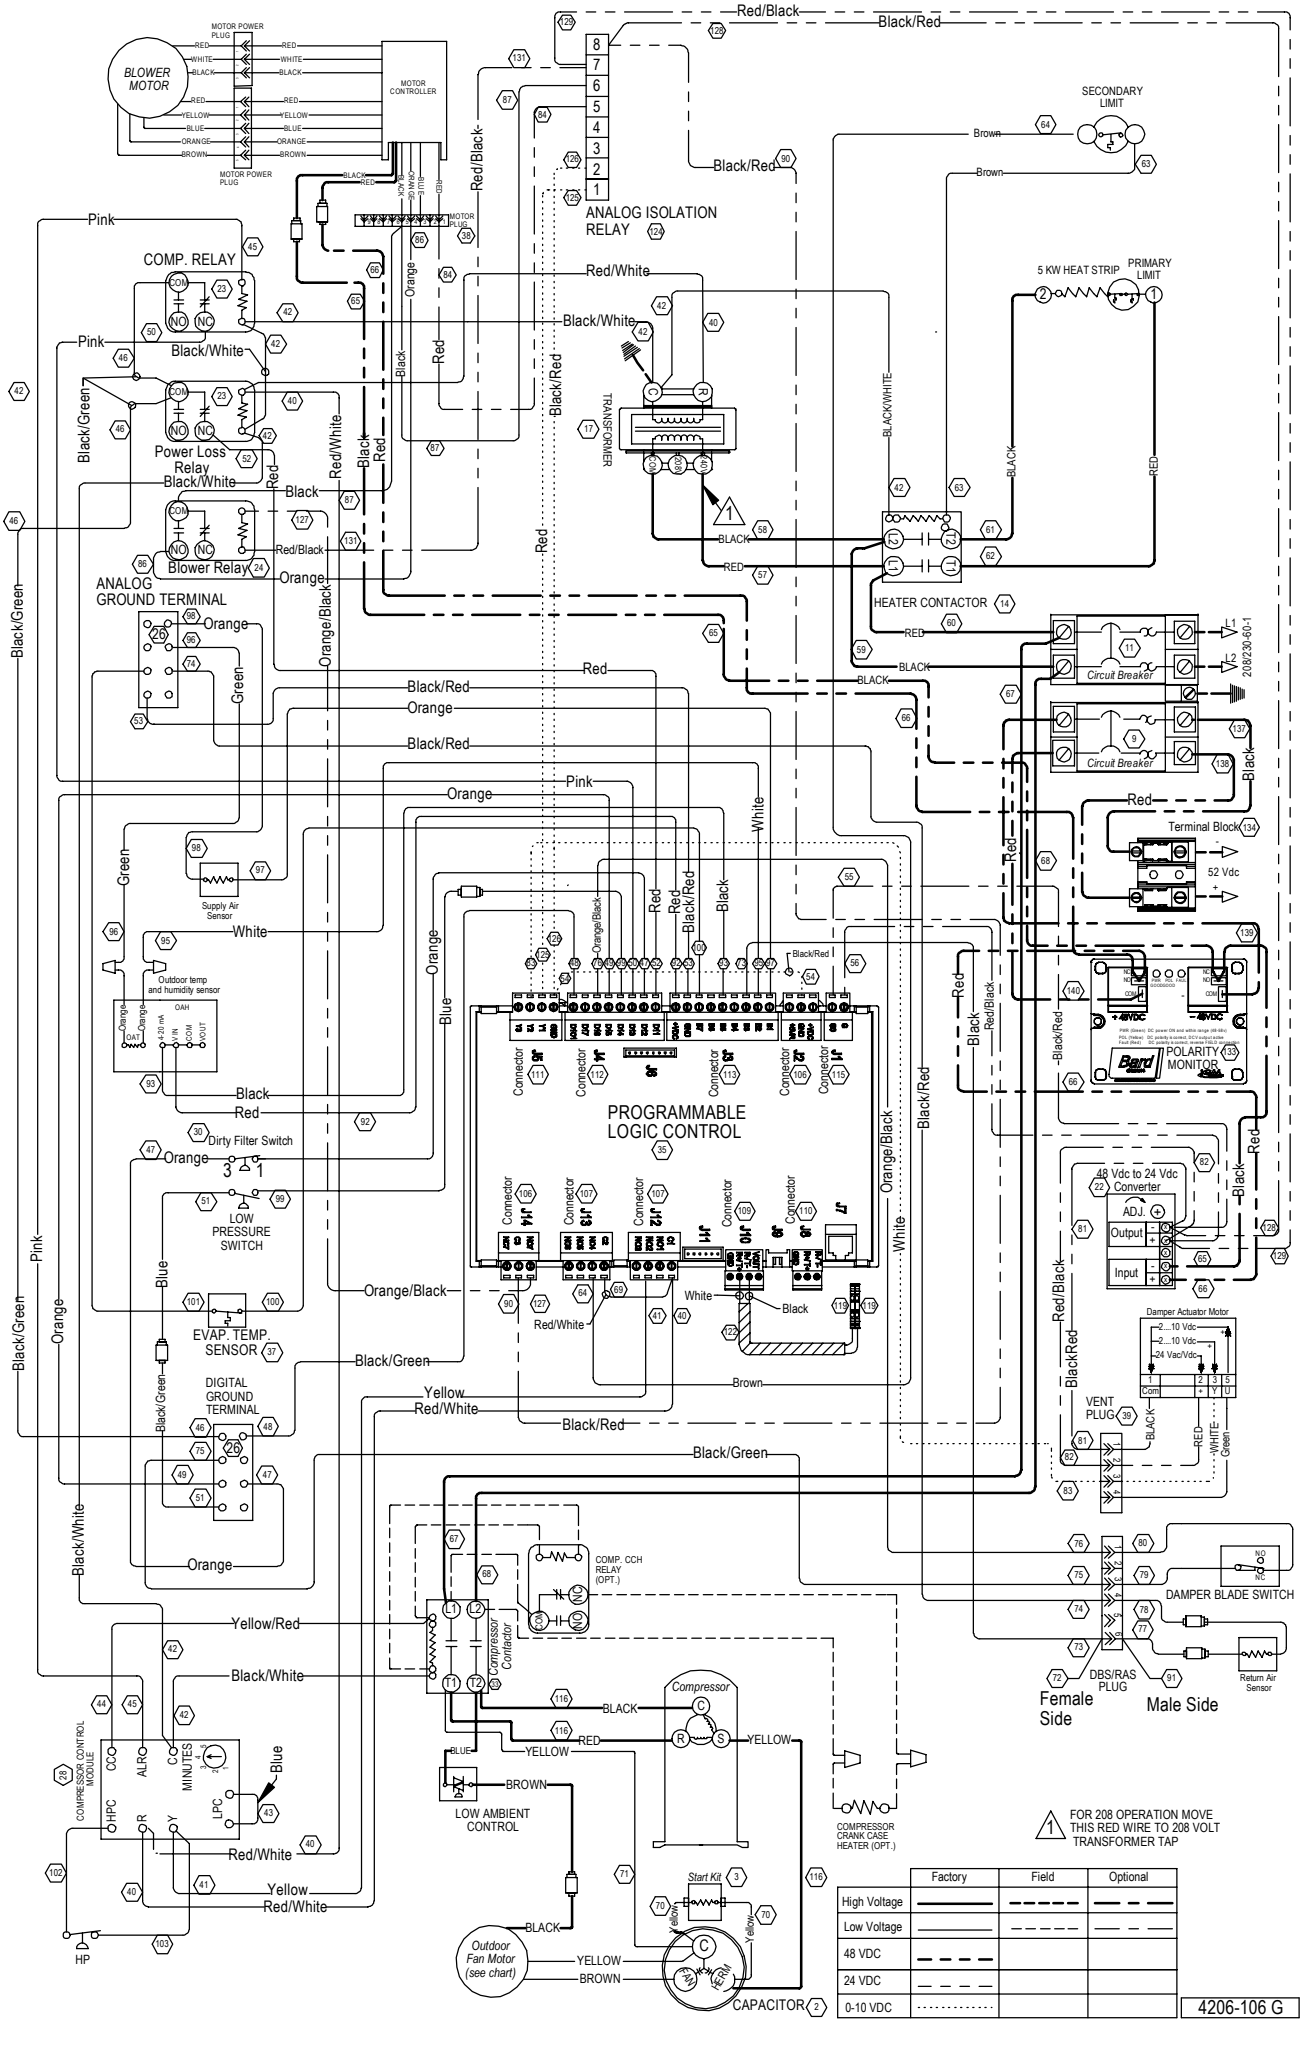
BLOWER MOTOR
MOTOR POWER PLUG
MOTOR CONTROLLER
ANALOG ISOLATION RELAY
SECONDARY LIMIT
PRIMARY LIMIT
5 KW HEAT STRIP
COMP. RELAY
Power Loss Relay
Blower Relay
ANALOG GROUND TERMINAL
TRANSFORMER
HEATER CONTACTOR
Circuit Breaker
Terminal Block
52 Vdc
POLARITY MONITOR
Supply Air Sensor
Outdoor temp and humidity sensor
PROGRAMMABLE LOGIC CONTROL
Dirty Filter Switch
LOW PRESSURE SWITCH
EVAP. TEMP. SENSOR
DIGITAL GROUND TERMINAL
48 Vdc to 24 Vdc Converter
Damper Actuator Motor
VENT PLUG
COMP. CCH RELAY (OPT.)
Compressor Contactor
Compressor
LOW AMBIENT CONTROL
COMPRESSOR CRANK CASE HEATER (OPT.)
DAMPER BLADE SWITCH
DBS/RAS PLUG
Return Air Sensor
Female Side
Male Side
COMPRESSOR CONTROL MODULE
HP
Start Kit
Outdoor Fan Motor (see chart)
CAPACITOR
1 FOR 208 OPERATION MOVE THIS RED WIRE TO 208 VOLT TRANSFORMER TAP
Factory
Field
Optional
High Voltage
Low Voltage
48 VDC
24 VDC
0-10 VDC
4206-106 G