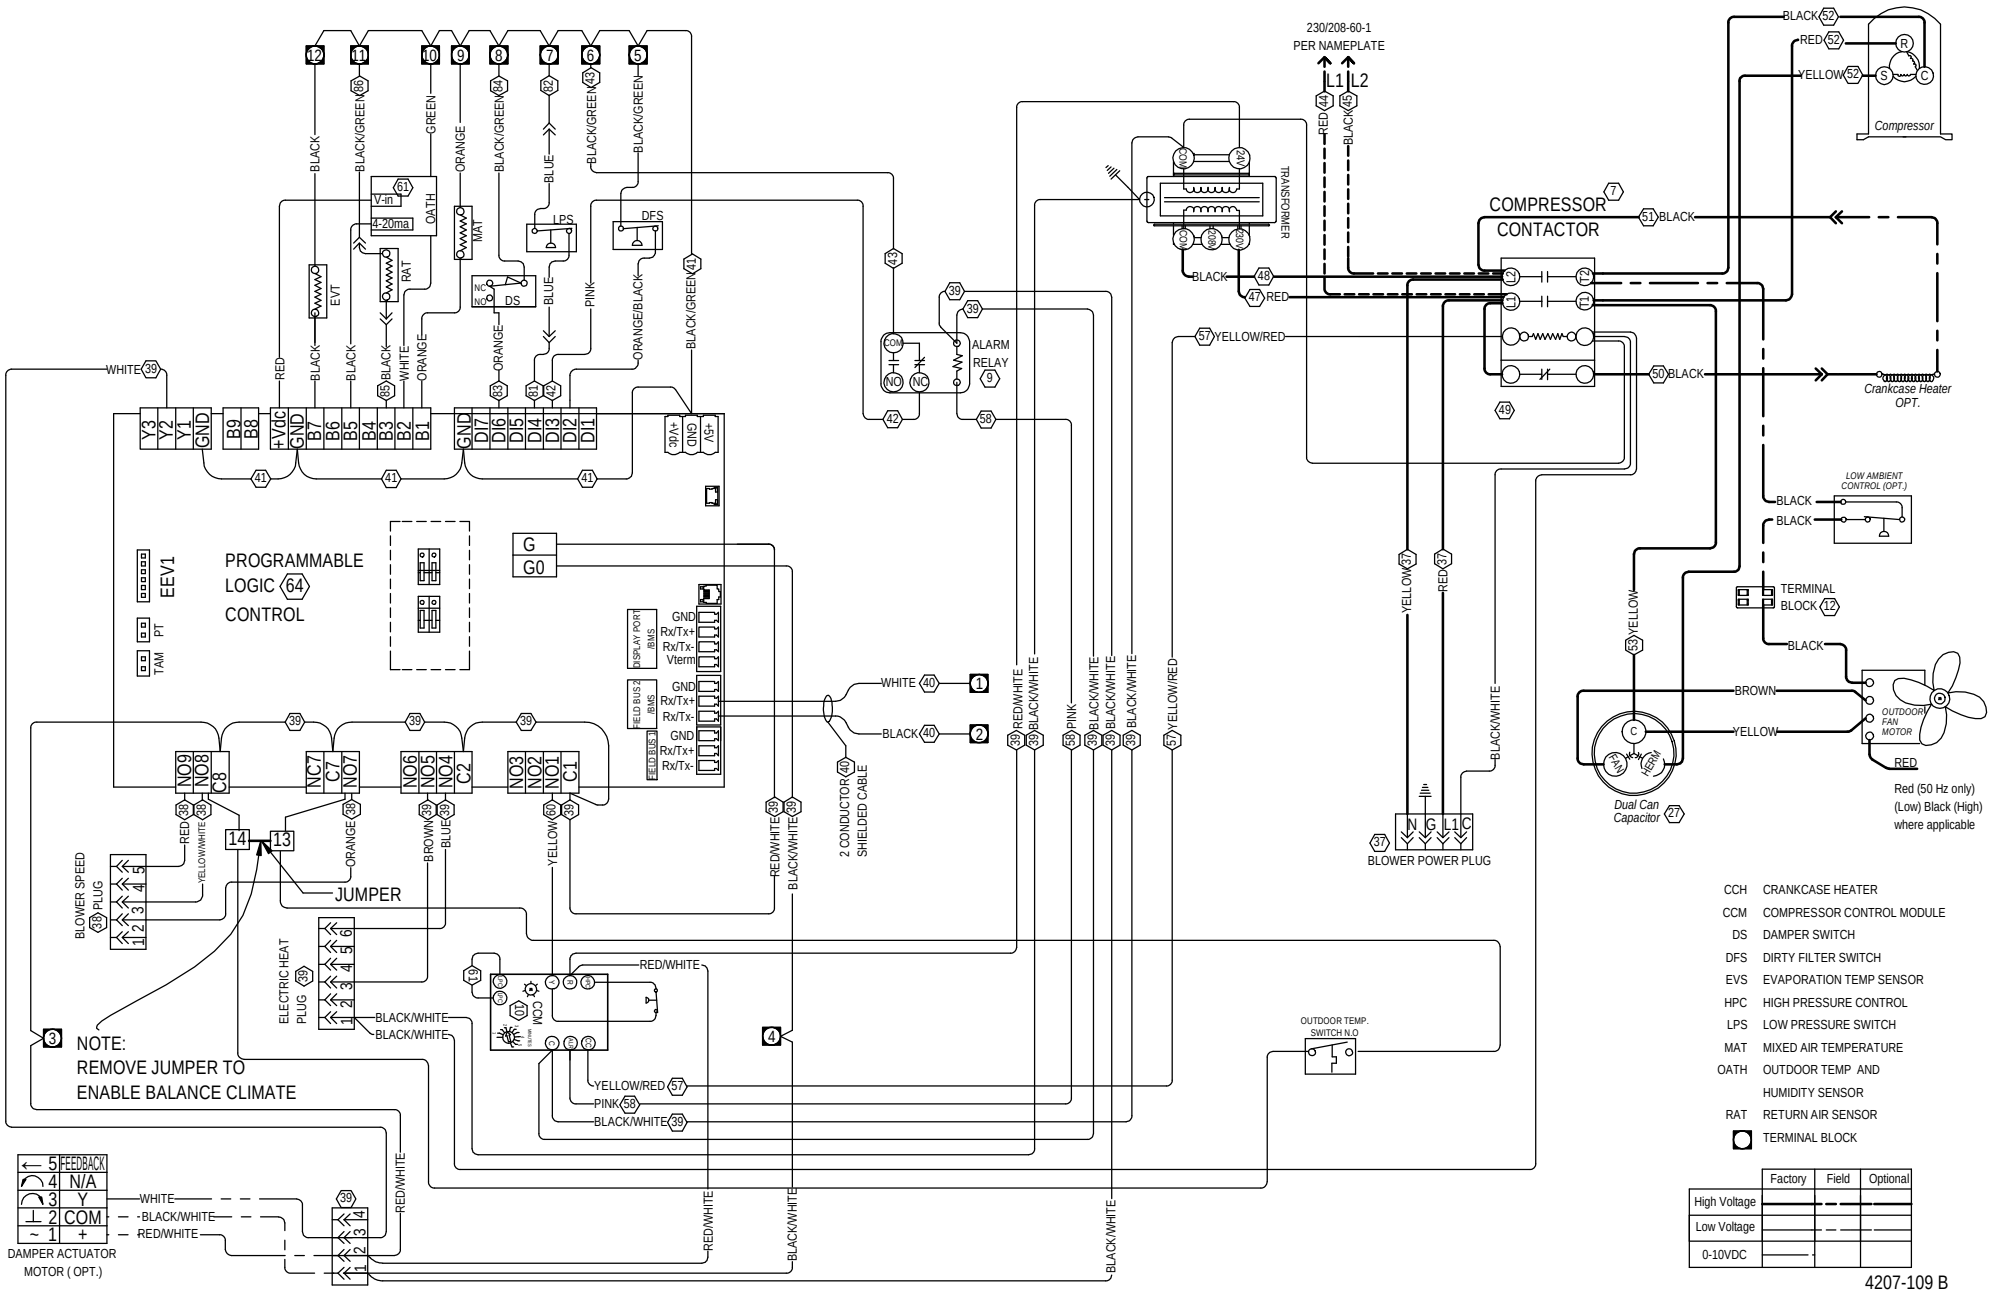
230/208-60-1
PER NAMEPLATE
L1 L2
TRANSFORMER
COMPRESSOR
CONTACTOR
Compressor
Crankcase Heater
OPT.
LOW AMBIENT
CONTROL (OPT.)
TERMINAL
BLOCK
OUTDOOR
FAN
MOTOR
Dual Can
Capacitor
Red (50 Hz only)
(Low) Black (High)
where applicable
BLOWER POWER PLUG
ALARM
RELAY
PROGRAMMABLE
LOGIC
CONTROL
EEV1
PT
TAM
V-in
4-20ma
OATH
MAT
RAT
EVT
LPS
DFS
DS
BLOWER SPEED
PLUG
ELECTRIC HEAT
PLUG
JUMPER
NOTE:
REMOVE JUMPER TO
ENABLE BALANCE CLIMATE
2 CONDUCTOR
SHIELDED CABLE
OUTDOOR TEMP.
SWITCH N.O
DAMPER ACTUATOR
MOTOR (OPT.)
FEEDBACK
N/A
COM
CCH CRANKCASE HEATER
CCM COMPRESSOR CONTROL MODULE
DS DAMPER SWITCH
DFS DIRTY FILTER SWITCH
EVS EVAPORATION TEMP SENSOR
HPC HIGH PRESSURE CONTROL
LPS LOW PRESSURE SWITCH
MAT MIXED AIR TEMPERATURE
OATH OUTDOOR TEMP AND
HUMIDITY SENSOR
RAT RETURN AIR SENSOR
TERMINAL BLOCK
Factory
Field
Optional
High Voltage
Low Voltage
0-10VDC
4207-109 B