


**Attention!** - A Bard constant-cfm blower kit has been installed in this unit. Please review this diagram before proceeding.

**A FULL LOAD SPEED SELECTION:**

- W60 AND W36 UNITS - LAND GRAY WIRE ON "R", CAP OFF PINK WIRE WITH WIRE NUT
- W48 UNITS - LAND PINK WIRE ON "R", CAP OFF GRAY WIRE WITH WIRE NUT
- ALL OTHER UNITS - CAP OFF BOTH WIRES WITH WIRE NUTS

For Vent Wiring or controller/thermostat connections, see literature packet or go to [www.bardhvac.com](http://www.bardhvac.com)

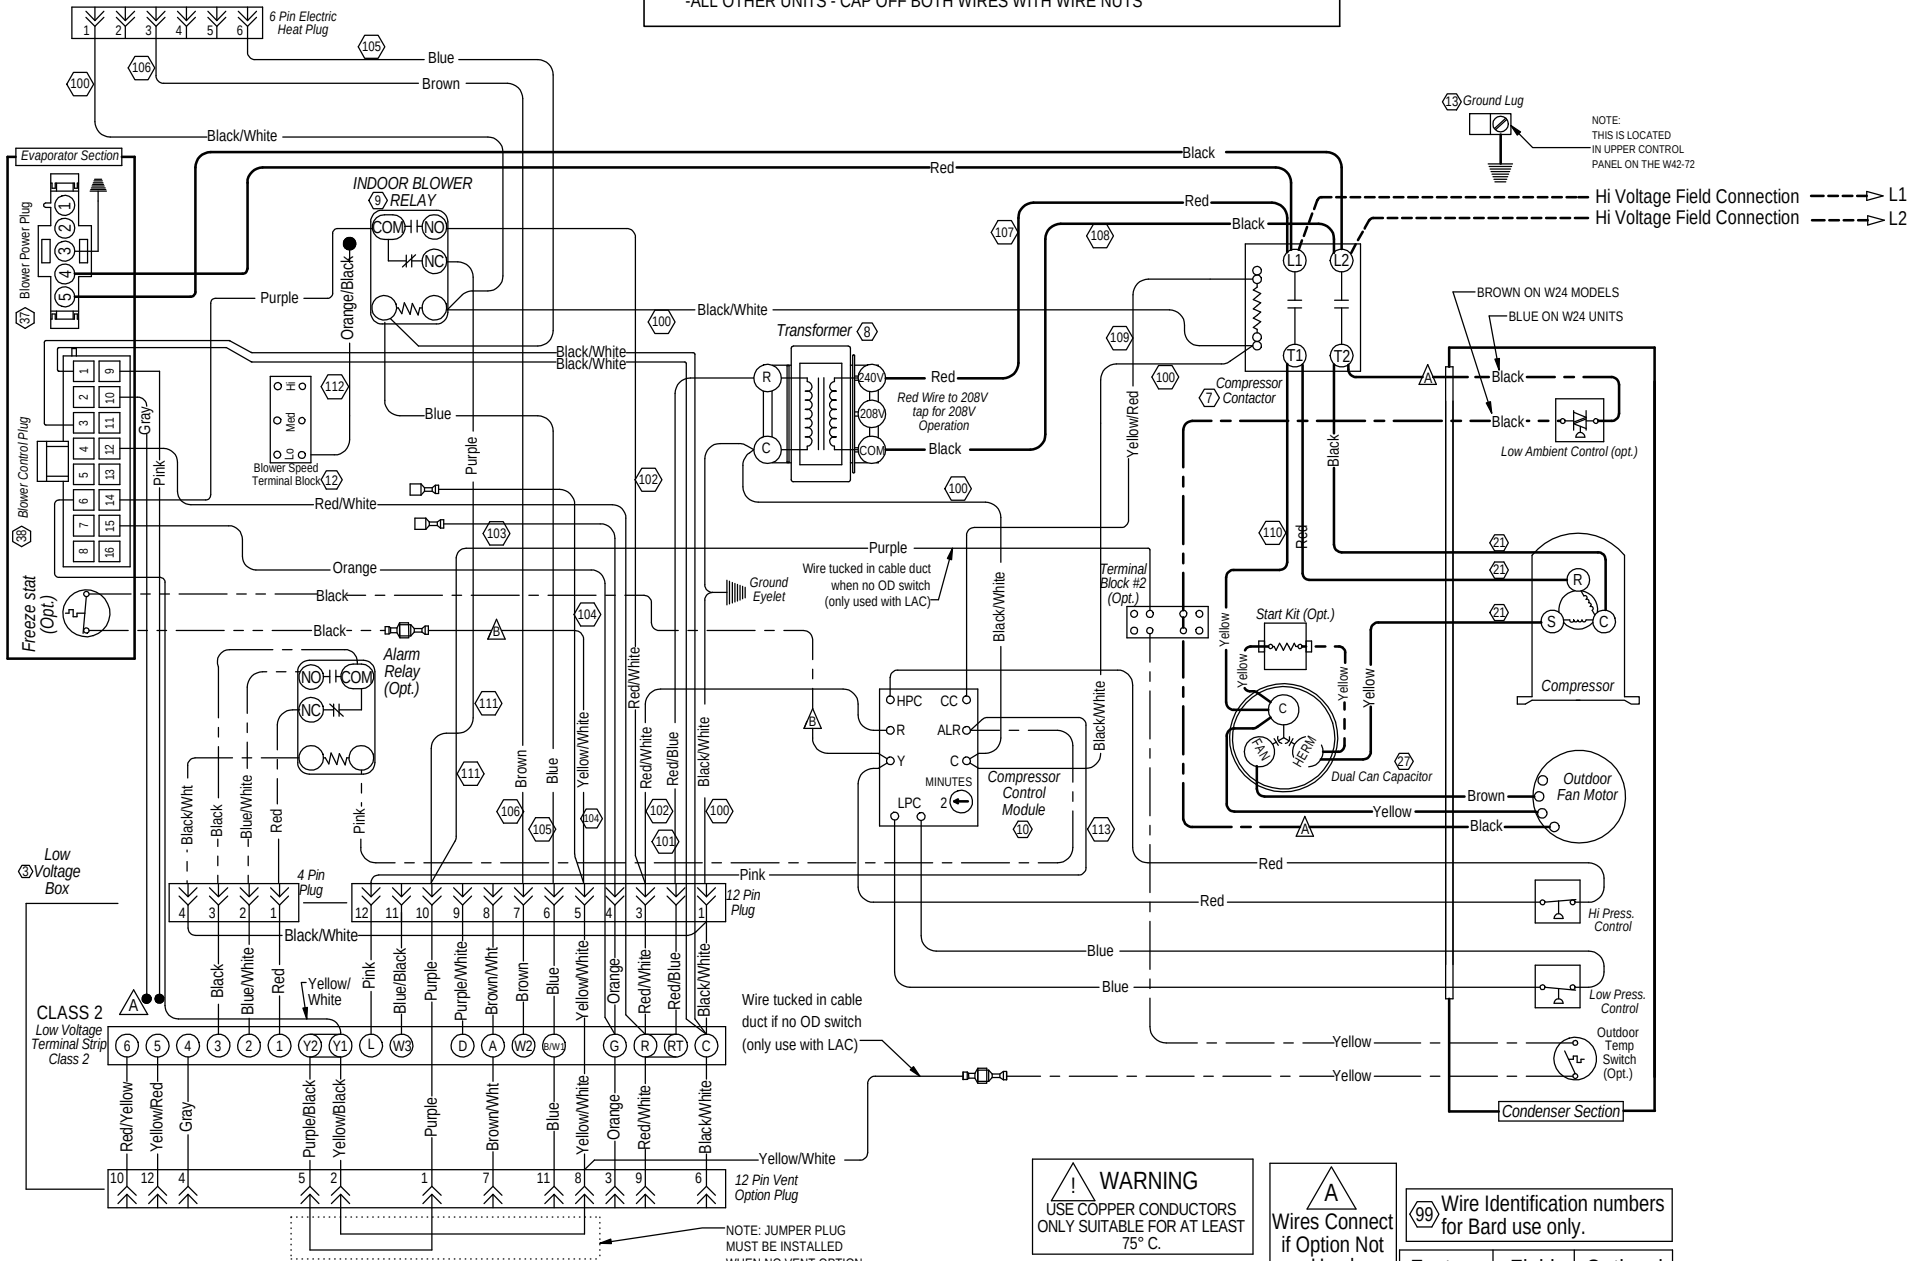

**WARNING**  
USE COPPER CONDUCTORS  
ONLY SUITABLE FOR AT LEAST  
75° C.

**DANGER**  
\*ELECTRICAL SHOCK HAZARD  
\*DISCONNECT POWER BEFORE  
SERVICING.

**A**  
Wires Connect  
if Option Not  
Used

High Voltage  
Low Voltage

**99** Wire Identification numbers  
for Bard use only.

| Factory | Field | Optional |
|---------|-------|----------|
|         |       |          |
|         |       |          |
|         |       |          |