


230/208-60-1
Per Nameplate L1 L2

For Unit Ladder Diagram, Vent Wiring, or controller/thermostat
connections, see installation instructions or go to www.bardhvac.com

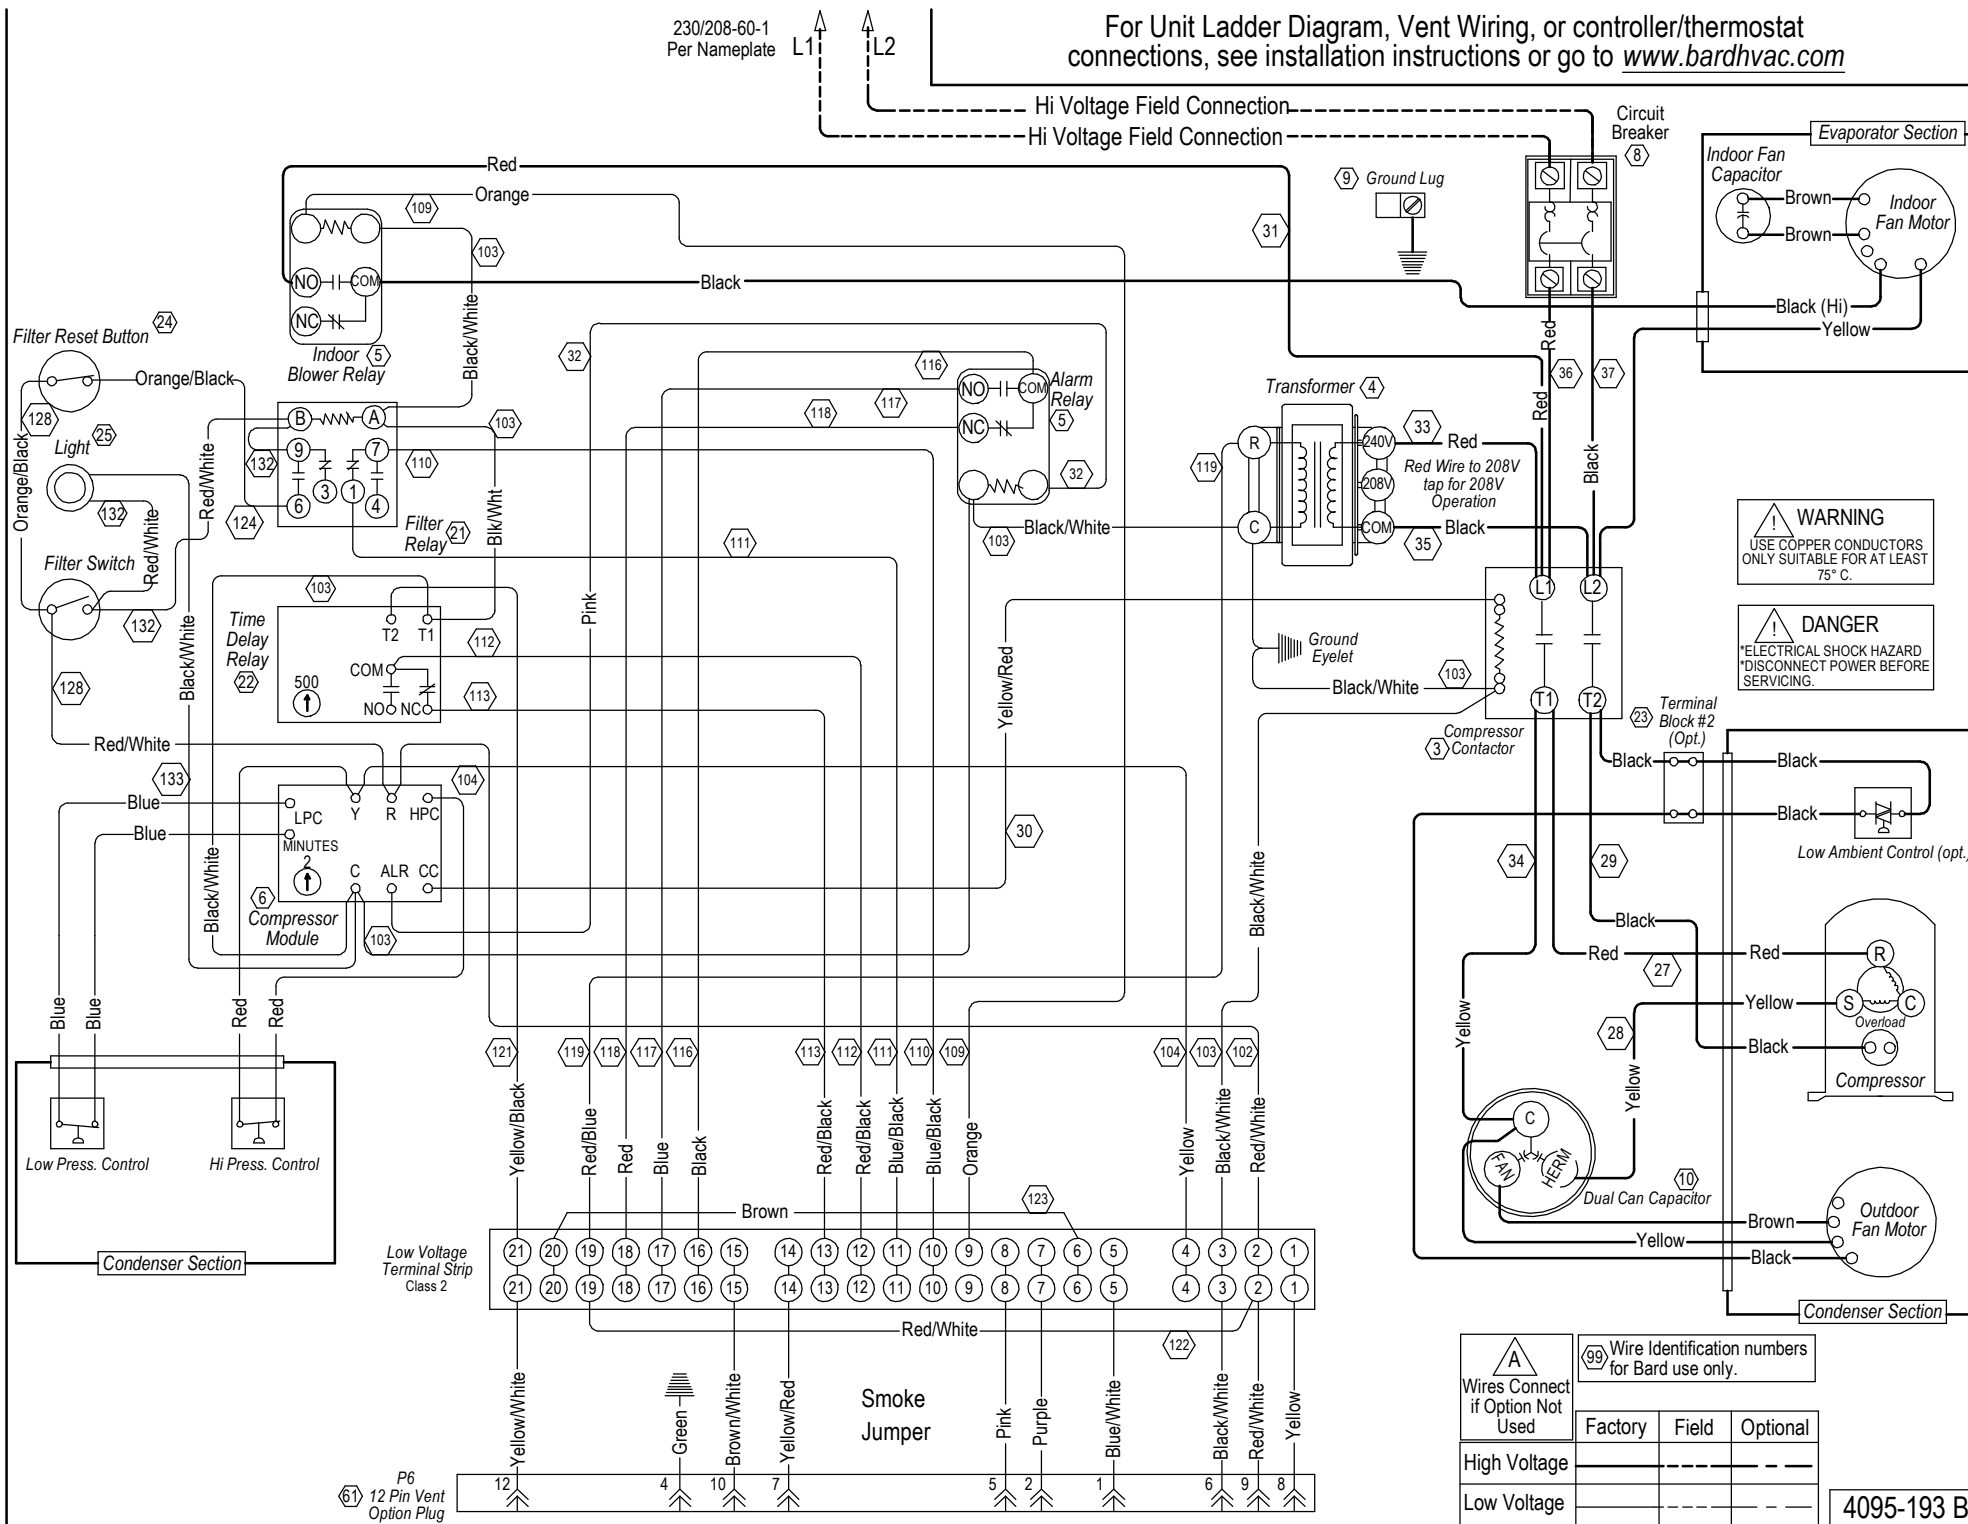

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE
SERVICING.

A Wires Connect if Option Not Used	99 Wire Identification numbers for Bard use only.		
	Factory	Field	Optional
High Voltage			
Low Voltage			

4095-193 B