


230/208-60-1
240/220-50-1
Per Nameplate

For Vent Wiring or controller/thermostat connections,
see literature packet or go to www.bardhvac.com

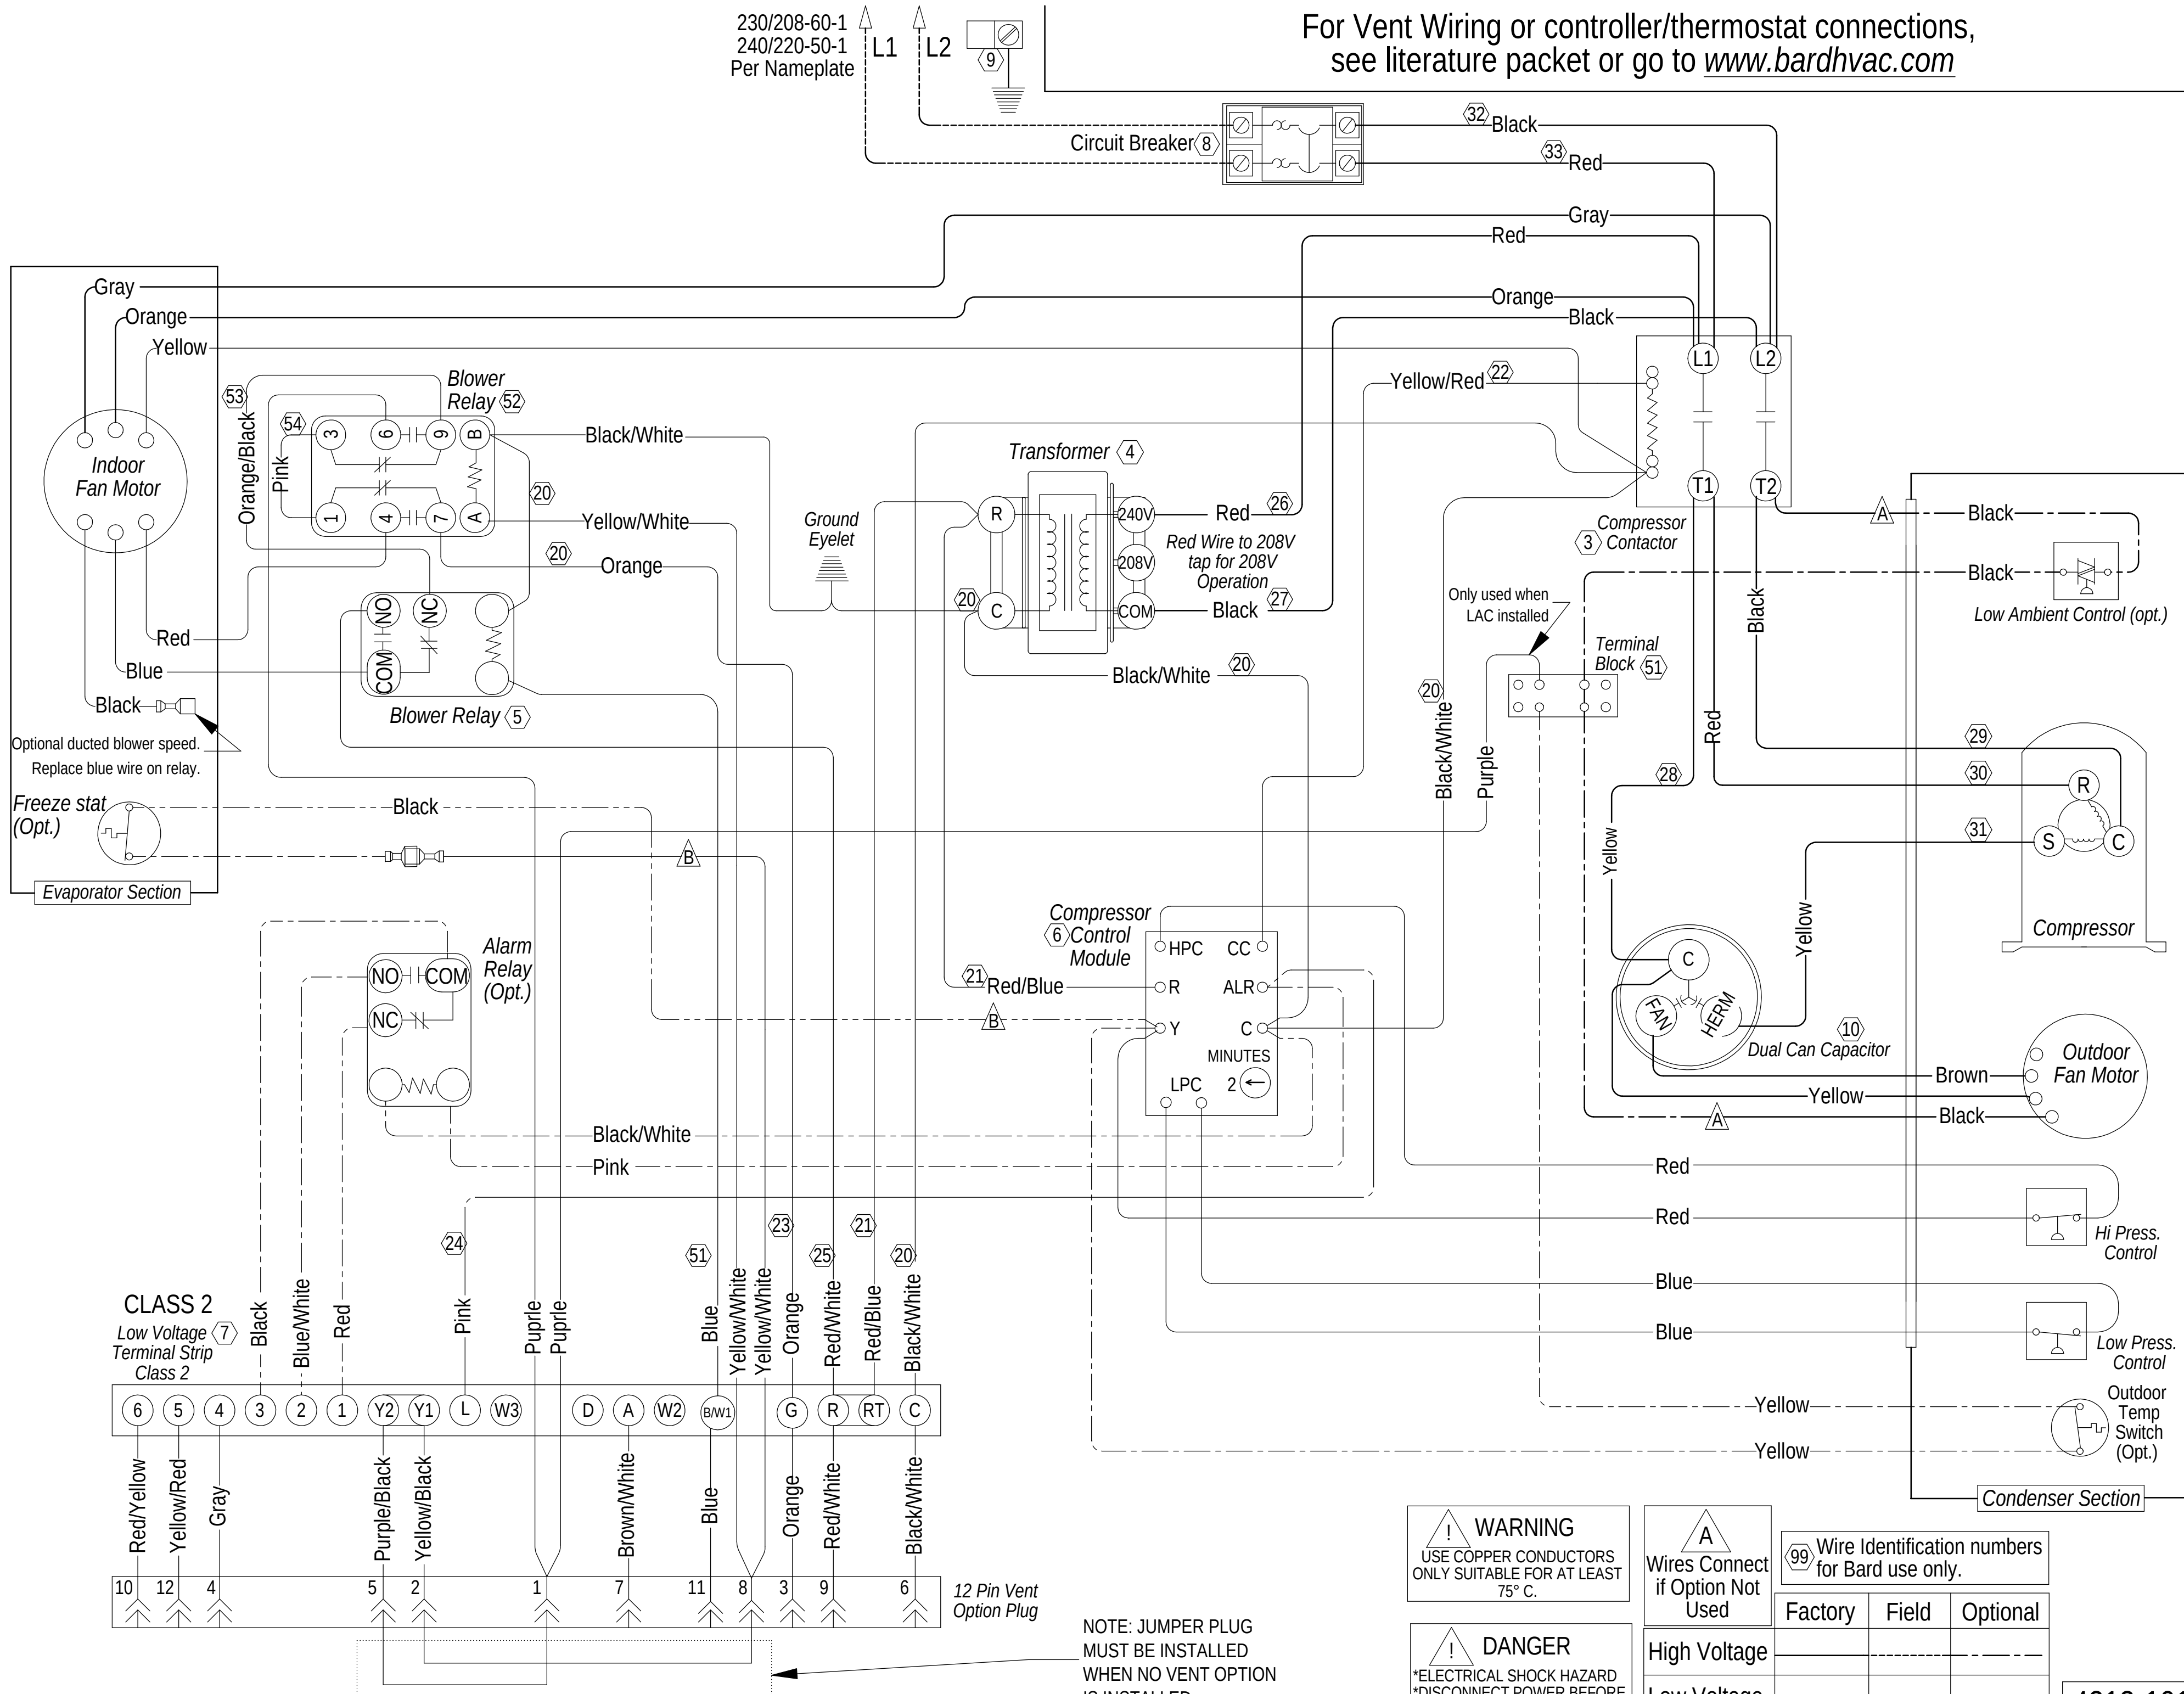

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE
SERVICING.

A
Wires Connect
if Option Not
Used

Wire Identification numbers for Bard use only.		
Factory	Field	Optional
High Voltage		
Low Voltage		

NOTE: JUMPER PLUG
MUST BE INSTALLED
WHEN NO VENT OPTION
IS INSTALLED